




[www.zhongyityres.com](http://www.zhongyityres.com)

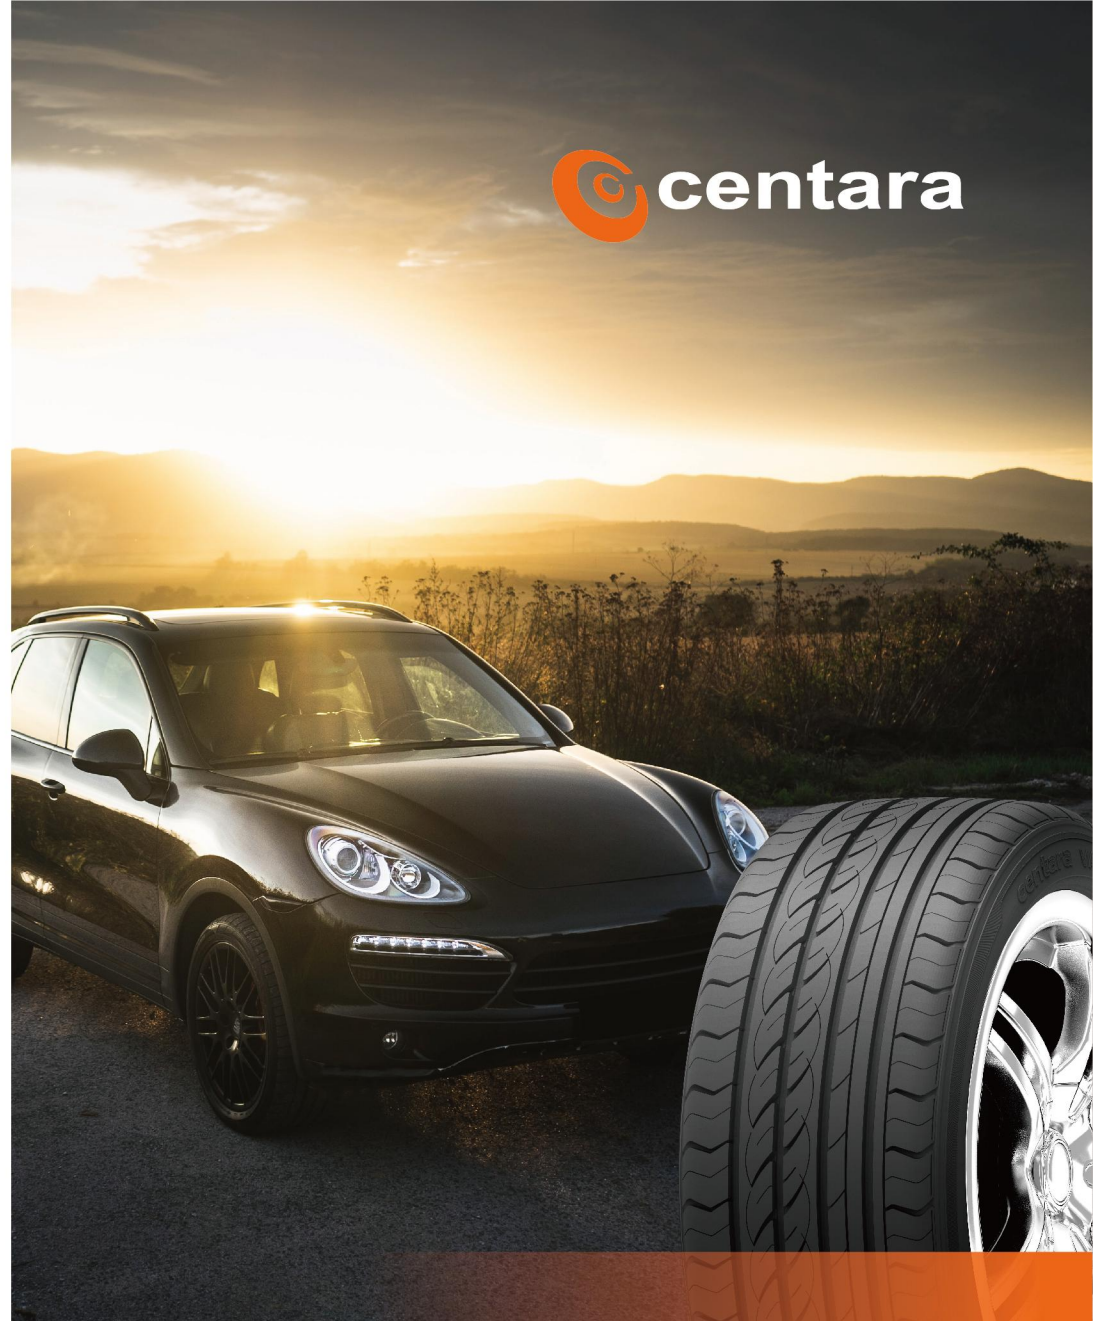

# TIRE CATALOG

*PASSENGER AND LIGHT TRUCK TIRES*

## Company Profile

ZhongYi Rubber Co., Ltd. is a professional R&D and manufacturing enterprise of high-performance all-steel radial tire, semi-steel radial tire, steel rope core and fabric core rubber conveyor belt. It has built a factory for designing three million sets of all-steel radial tires per year, and cooperated with a factory for designing six million sets of semi-steel radial tires per year and one for fabric core rubber conveyor belt. A rubber conveyor belt factory with an annual capacity of 40 million square meters is designed.

The company's self-built and cooperative factories are equipped with leading international production and testing equipment, such as Japan Shenyang Iron and Steel Mixer, Italy Rudolph calender, Germany Tellest Triple Production Line and Krupp Double Complex Production Line, Germany Fisher Cutter, America Akron Dynamic Balance Uniformity Testing Machine, etc. The tire factory cooperated by the company has passed ISO/TS16949 quality management system certification, ISO14001 environmental management system certification and OHSAS18001 occupational health and safety management system certification, and the laboratory has passed ISO17025 standard laboratory certification.

All-steel radial tire products have passed CCC mandatory product certification in China, semi-steel radial tire products have passed CCC mandatory product certification in China, DOT certification in the United States Department of Transport, ECE certification in the European Union, GCC certification in the seven Gulf countries in the Middle East, INMETRO certification in Brazil, BIS certification in India and SONCAP certification in Nigeria. The product conforms to REACH regulation and labeling law.

The company owns and cooperates with "JOYROAD", "CENTARA", and other tire brands as well as "JOYTRANS", "ZhongYi" conveyor belt brands. We are committed to providing users with a safer and more comfortable driving experience. We make every tire well. Our products are well received by our customers. Our products are sold all over the country and exported to more than 100 countries and regions such as Europe, America, Africa, Southeast Asia, Middle East, the United States, Japan, Australia and India.





# **CENTARA TIRE**

## **CENTARA Qualifications**

### **Touring Performance**

VANTI AS ..... 1-2

### **High Performance**

VANTI TOURING ..... 3-4

VANTI TOURING S1 ..... 5-6

VANTI TAXI ..... 7

### **Commercial Light Truck**

MILEMAX ..... 8

COMMERCIAL ..... 9-10

KARRIER MAX ..... 11-12

### **Ultra High Performance**

VANTI HP ..... 13-16

### **SUV/Light Truck**

VANTI CS ..... 17-18

TERRENA A/T ..... 19-20

### **A/T Tire**

ADVENTURE A/T ..... 21-22

### **HT Tire**

GRAND TOURER H/T ..... 23-24

### **Mud Tire**

TERRENA M/T ..... 25-26

### **Winter Tire**

VANTI WINTER ..... 27-28

SNOW CUTTER ..... 29-30

WINTER 621 ..... 31-32

WINTER 626 ..... 33-34

WINTER 628 ..... 35




### **Trailer Tire**

ST RADIAL ..... 36

### **New Energy Tire**

e.VANTI EV7 ..... 37









## VANTI AS

- ©Optimized pitch design effectively reduces tire noise.
- ©Anti-slip sipe improves driving stability and braking performance on wet road.
- ©Streamline transversal grooves ensure safe handling and high speed stability.

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
145/70R12	69	T	4.50B	150	509	325	716	300	44	6.1
135/80R13	70	T	4.50B	157	578	437	963	300	44	7.3
145/70R13	74	N	4.50B	150	534	375	827	300	44	6.3
155/65R13	73	T	4.50B	157	532	365	805	300	44	7.3
155/70R13	75	T	4.50B	157	548	387	853	300	44	7.4
155/80R13	79	T	4.50B	157	578	437	963	300	44	7.3
165/65R13	77	T	5.00B	170	544	412	908	300	44	7.6
165/70R13	79	T	5.00B	170	562	437	963	300	44	7.6
165/80R13	83	T	4.50B	165	594	487	1074	300	44	7.8
175/60R13	77	H	5J	177	540	412	908	300	44	7.3
175/70R13	82	H	5.00B	177	576	475	1047	300	44	7.8
185/70R13	86	T	5.50B	189	590	530	1168	300	44	7.8
165/70R14	81	T	5J	170	588	462	1019	300	44	7.6
175/65R14	82	H	5J	177	584	475	1047	300	44	7.8
175/65R14	86 XL	T	5J	177	584	530	1168	340	51	7.8
175/70R14	84	H	5J	177	602	500	1102	300	44	7.8
175/70R14	88 XL	T	5J	177	602	560	1235	340	51	7.8
185/70R14	88	H	51/2J	189	616	560	1235	300	44	7.8

SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
155R12C	88/86	Q	8PR	4.50B	157	550	560	1235	530	1168	450	65	7.6
155R12C	83/81	Q	6PR	4.50B	157	550	487	1075	462	1020	350	51	7.6








# VANTI TOURING

- ©Four grooves with open shoulder provides perfect water evacuation.
- ©Center rib design delivers better straight handling.
- ©Improved shoulder sipes provide better handling during cornering and low noise emission.

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
175/70R12	80	T	5.00B	177	551	450	992	300	44	7.0
165/65R13	77	T	5J	170	544	412	908	300	44	7.6
165/60R14	75	T	5J	170	554	387	853	300	44	7.6
185/60R14	82	H	51/2J	189	578	475	1047	300	44	7.8
185/65R14	86	H	51/2J	189	596	530	1168	300	44	7.8
185/70R14	88	H	51/2J	189	616	560	1235	300	44	7.8
195/60R14	86	H	6J	201	590	530	1168	300	44	7.8
195/70R14	91	H	6J	201	630	615	1356	300	44	7.8
205/60R14	88	V	6J	209	602	560	1235	300	44	7.8
205/70R14	98 XL	V	6J	209	644	750	1653	340	49	7.8
185/55R15	82	V	6J	194	585	475	1047	300	44	7.8
185/60R15	84	H	5 1/2J	189	603	500	1102	300	44	7.8
185/65R15	92 XL	T	51/2J	189	621	630	1389	340	49	7.8
185/65R15	88	H	51/2J	189	621	560	1235	300	44	7.8
195/50R15	82	V	6J	201	577	475	1047	300	44	7.8
195/55R15	85	V	6J	201	595	515	1135	300	44	7.8
195/60R15	88	V	6J	201	615	560	1235	300	44	7.8
195/65R15	95 XL	H	6J	201	635	690	1521	340	49	7.8
195/65R15	91	V	6J	201	635	615	1356	300	44	7.8
205/60R15	91	V	6J	209	627	615	1356	300	44	7.8
205/65R15	94	V	6J	209	647	670	1477	300	44	7.8
P215/75R15	100	H	6J	216	703	800	1764	300	44	7.8
P225/75R15	104	V	6J	223	719	900	1984	300	44	7.8
205/55R16	91	V	61/2J	214	632	615	1356	300	44	7.8
205/60R16	92	V	6J	209	652	630	1389	300	44	7.8
205/60R16	96 XL	V	6J	209	652	710	1565	340	49	7.8
215/60R16	95	V	61/2J	221	664	690	1521	300	44	7.8
215/60R16	99 XL	V	61/2J	221	664	775	1709	340	49	7.8
215/65R16	98	V	61/2J	221	686	750	1653	300	44	7.8
225/60R16	98	V	61/2J	228	676	750	1653	300	44	7.8

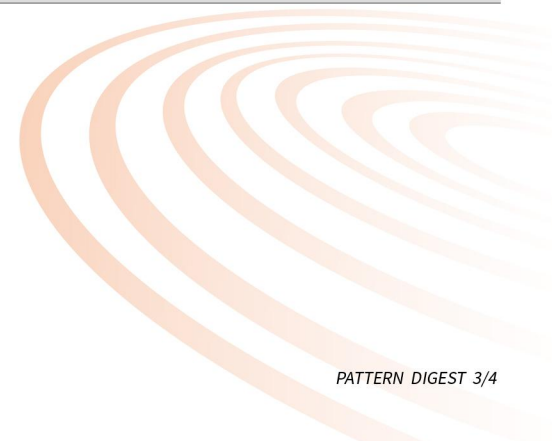





# VANTI TOURING S1

- ©Four grooves with open shoulder provides perfect water evacuation.
- ©Center rib design delivers better straight handling.
- ©Improved shoulder sipes provide better handling during cornering and low noise emission.

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
185/60R14	82	H	5 1/2J	189	578	475	1047	300	44	7.0
185/65R14	86	H	5 1/2J	189	596	530	1168	300	44	7.0
185/70R14	88	H	5 1/2J	189	616	560	1235	300	44	6.7
195/60R14	86	H	6J	201	590	530	1168	300	44	7.0
195/70R14	91	H	6J	201	630	615	1356	300	44	7.0
205/60R14	88	V	6J	209	602	560	1235	300	44	7.3
205/70R14	98 XL	H	6J	209	644	750	1653	340	50	7.0
175/65R15	84	H	5J	177	609	500	1102	300	44	6.7
185/55R15	82	V	6J	194	585	475	1047	300	44	7.0
185/60R15	84	H	5 1/2J	189	603	500	1102	300	44	7.0
185/65R15	88	H	5 1/2J	189	621	560	1235	300	44	7.0
195/50R15	82	V	6J	201	577	475	1047	300	44	7.0
195/55R15	85	V	6J	201	595	515	1135	300	44	7.0
195/60R15	88	V	6J	201	615	560	1235	300	44	7.0
195/65R15	91	V	6J	201	635	615	1356	300	44	7.0
205/60R15	91	V	6J	209	627	615	1356	300	44	7.3
205/65R15	94	V	6J	209	647	670	1477	300	44	7.3
215/75R15	100	H	6J	216	703	800	1764	300	44	6.9
225/75R15	102	H	6J	223	719	850	1874	300	44	7.3
205/55R16	91	V	6 1/2J	214	632	615	1356	300	44	7.3
205/60R16	92	V	6J	209	652	630	1389	300	44	7.3
205/65R16	95	V	6J	209	672	690	1521	300	44	7.3
215/60R16	95	V	6 1/2J	221	664	690	1521	300	44	7.3
215/65R16	98	V	6 1/2J	221	686	750	1653	300	44	7.3
225/60R16	98	V	6 1/2J	228	676	750	1653	300	44	7.3





## High Performance

PASSION FOR PERFECTION

## Commercial Light Truck

### VANTI TAXI



### MILEMAX

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
165/70R13	79	T	5.00B	170	562	437	963	300	44	8.7
175/70R14	84	T	5.00B	177	602	500	1102	300	44	8.7
185/60R14	82	H	5 1/2J	189	578	475	1047	300	44	8.7
195/60R14	86	H	6J	201	590	530	1168	300	44	8.7
185/60R15	84	H	5 1/2J	189	603	500	1102	300	44	8.2
185/65R15	88	H	5 1/2J	189	621	560	1235	300	44	8.7
195/60R15	88	H	6J	201	615	560	1235	300	44	8.7
195/65R15	91	H	6J	201	635	615	1356	300	44	8.7
205/65R15	94	V	6J	209	647	670	1477	300	44	8.2
205/55R16	94 XL	V	6 1/2J	214	632	670	1477	340	49	8.2

SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
155R13C	90/88	N	8PR	4.50B	157	578	600	1323	565	1245	450	65	8.0
165R13C	94/93	N	8PR	4.50B	165	594	670	1475	650	1435	450	65	8.0
165/70R13LT	88/86	T	6PR	5.00B	170	562	560	1235	530	1170	375	54	8.0
175R13C	97/95	Q	8PR	5.00B	177	610	730	1609	690	1521	450	65	8.0
165/70R14LT	89/87	R	6PR	5J	170	588	580	1280	545	1200	375	54	8.0





# COMMERCIAL



- ©Special compound design ensures a long mileage.
- ©The combination of blocks provides a superior driving performance and a strong grip.
- ©Three main grooves contribute to better water drainage and wet traction.


SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
175/70R14LT	95/93	R	6PR	5J	177	602	690	1520	650	1435	375	54	8.0
185R14C	102/100	Q	8PR	5 1/2J	188	650	850	1874	800	1764	450	65	8.4
195R14C	106/104	Q	8PR	5 1/2J	198	666	950	2094	900	1984	450	65	8.7
195R15C	106/104	Q	8PR	5 1/2J	198	690	950	2094	900	1984	450	65	8.7
195/70R15C	104/102	R	8PR	6J	201	655	900	1984	850	1874	450	65	10.2
205/70R15C	106/104	R	8PR	6J	209	669	950	2094	900	1984	450	65	10.2
215/75R15LT	100/97	N	6PR	6J	216	703	800	1765	730	1610	350	50	9.7
225/70R15C	112/110	R	8PR	6 1/2J	228	697	1120	2469	1060	2337	450	65	10.2
185/75R16C	104/102	R	8PR	5J	184	684	900	1984	850	1874	475	68	8.4
195/65R16C	104/102	R	8PR	6J	201	660	900	1984	850	1874	475	68	9.7
195/75R16C	107/105	R	8PR	5 1/2J	196	698	975	2149	925	2039	475	68	8.7
205/65R16C	107/105	R	8PR	6J	209	672	975	2149	925	2039	475	68	9.7
215/65R16C	109/107	R	8PR	6 1/2J	221	686	1030	2271	975	2149	475	68	9.7
215/70R16LT	104/102	N	8PR	6 1/2J	221	708	900	1984	850	1874	450	65	9.7
215/75R16C	116/114	R	10PR	6J	216	728	1250	2756	1180	2601	525	76	9.7
225/65R16C	112/110	R	8PR	6 1/2J	228	698	1120	2469	1060	2337	475	68	9.7
235/65R16C	115/113	R	8PR	7J	240	712	1215	2679	1150	2535	475	68	9.7



Handling



Braking

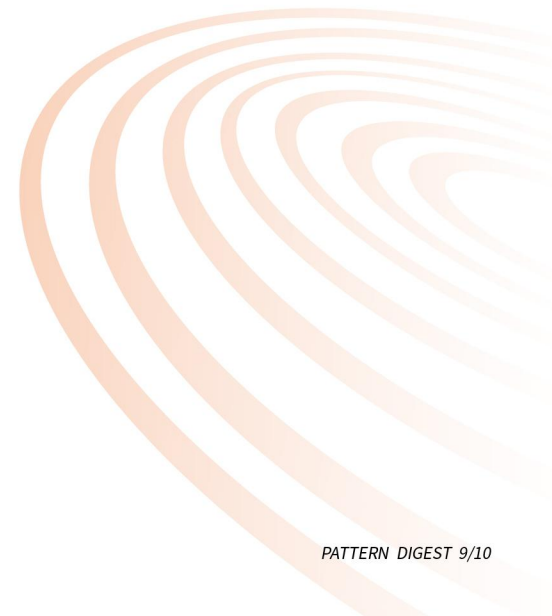





SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
6.00R13LT	93/89	P	8PR	4.50B	170	655	650	1435	580	1280	415	60	8.2
6.00R14LT	95/90	P	8PR	4 1/2J	170	680	690	1520	600	1325	415	60	8.2
6.00R15LT	97/92	P	8PR	4.50E	170	705	730	1610	630	1390	460	67	8.2
6.00R16LT	107/102	M	10PR	5.50F	185	750	975	2150	850	1875	560	81	9.7
6.50R16LT	107/102	M	10PR	5.50F	185	750	975	2150	850	1875	560	81	9.7
7.00R16LT	117/116	N	12PR	5.50F	200	775	1285	2835	1250	2755	670	97	10.7
7.50R16LT	123/121	M	14PR	6.00G	215	805	1510	3330	1440	3175	700	102	10.7

# KARRIER MAX

©Suitable for various light-load goods vehicles.

©Excellent traction, braking and steering performance combined with good water dispersion and self-cleaning ability.



Handling




Braking



Drainage





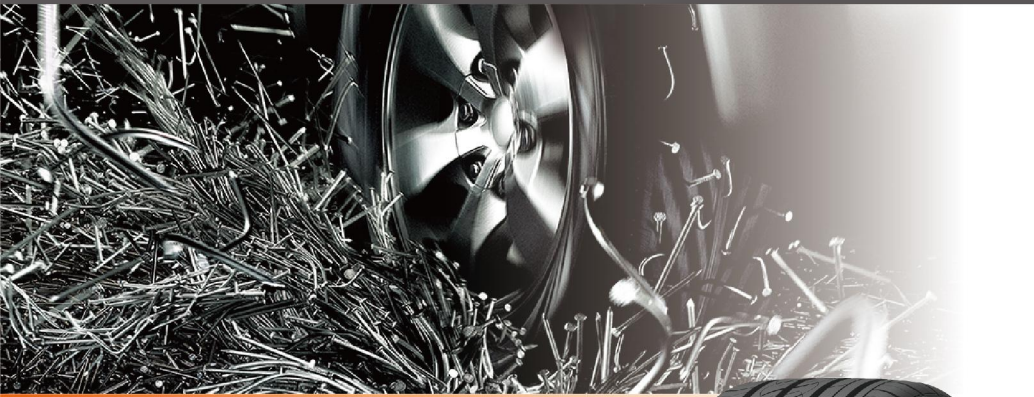

## VANTI HP

- ©Special asymmetric pattern design provides excellent high speed and handling performance.
- ©Spiral groove design contributes to outstanding water evacuation and wet grip.
- ©Special compound design reduces heat generation and enhances grip performance under all road conditions.



Handling



Braking



Drainage

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
175/50R16	77	V	5 1/2J	182	582	412	908	300	44	7.2
185/50R16	81	V	6J	194	592	462	1019	300	44	7.2
195/45R16	84 XL	V	6 1/2J	195	582	500	1102	340	50	7.2
195/50R16	88 XL	V	6J	201	602	560	1235	340	50	7.2
195/55ZR16	87	W	6J	201	620	545	1201	300	44	7.2
195/60R16	89	H	6J	201	640	580	1279	300	44	7.2
205/45ZR16	87 XL	W	7J	206	590	545	1201	340	50	7.2
205/50R16	87	W	6 1/2J	214	612	545	1201	300	44	7.2
205/50R16	91	W	6 1/2J	214	632	615	1356	300	44	7.2
205/55R16	94 XL	W	6 1/2J	214	632	670	1477	340	51	7.2
215/55R16	97 XL	W	7J	226	642	730	1609	340	51	7.2
225/50R16	96 XL	W	7J	233	632	710	1565	340	51	7.2
225/55R16	99 XL	W	7J	233	654	775	1709	340	51	7.2
195/40ZR17	81 XL	W	7J	200	588	462	1019	340	50	7.2
195/45ZR17	85 XL	W	6 1/2J	195	608	515	1135	340	50	7.2
205/40R17	84 XL	W	7 1/2J	212	596	500	1102	340	51	7.2
205/45R17	88 XL	W	7J	206	616	560	1235	340	51	7.2
205/50R17	93 XL	W	6 1/2J	214	638	650	1433	340	51	7.2
215/40R17	87 XL	W	7 1/2J	218	604	545	1201	340	51	7.2
215/45R17	91 XL	W	7J	213	626	615	1356	340	51	7.2
215/50ZR17	95 XL	W	7J	226	648	690	1521	340	50	7.2
215/55R17	98 XL	W	7J	226	668	750	1653	340	50	7.2
225/45R17	94 XL	W	7 1/2J	225	634	670	1477	340	51	7.2
225/50ZR17	98 XL	W	7J	233	658	750	1653	340	50	7.2
225/55R17	101 XL	W	7J	233	680	825	1819	340	51	7.2
235/45R17	97 XL	W	8J	236	644	730	1609	340	51	7.2
235/50ZR17	96	W	7 1/2J	245	668	710	1565	300	44	7.2
235/55R17	103 XL	W	7 1/2J	245	690	875	1929	340	51	7.2
245/45ZR17	99 XL	W	8J	243	652	775	1709	340	50	7.2
215/35R18	84 XL	W	7 1/2J	218	607	500	1102	340	51	7.2
215/40ZR18	85	W	7 1/2J	218	629	515	1135	300	44	7.2
215/45ZR18	89	W	7J	213	651	580	1279	300	44	7.2
225/40R18	92 XL	W	8J	230	637	630	1389	340	51	7.2
225/45ZR18	95 XL	W	7 1/2J	225	659	690	1521	340	50	7.2
235/40R18	95 XL	W	8 1/2J	241	645	690	1521	340	51	7.2
235/45ZR18	98 XL	W	8J	236	669	750	1653	340	50	7.2
235/50ZR18	101 XL	W	7 1/2J	245	693	825	1819	340	50	7.2
235/55R18	104 XL	V	7 1/2J	245	715	900	1984	340	49	7.2
245/40ZR18	97 XL	W	8 1/2J	248	653	730	1609	340	50	7.2
245/45ZR18	100 XL	W	8J	243	677	800	1764	340	50	7.2



## VANTI HP

- ©Special asymmetric pattern design provides excellent high speed and handling performance.
- ©Spiral groove design contributes to outstanding water evacuation and wet grip.
- ©Special compound design reduces heat generation and enhances grip performance under all road conditions.



SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
245/50ZR18	100	W	7 1/2J	253	703	800	1764	300	44	7.2
255/35ZR18	94 XL	W	9J	260	635	670	1477	340	50	7.2
265/35ZR18	93	W	9 1/2J	271	643	650	1433	300	44	7.2
225/35ZR19	84	W	8J	230	641	500	1102	300	44	7.2
235/35ZR19	91 XL	W	8 1/2J	241	647	615	1356	340	50	7.2
235/40ZR19	92	W	8 1/2J	241	671	630	1389	300	44	7.2
245/35ZR19	93 XL	W	8 1/2J	248	655	650	1433	340	50	7.2
245/40ZR19	98 XL	W	8 1/2J	248	679	750	1653	340	50	7.2
245/45ZR19	98	W	8J	243	703	750	1653	300	44	7.2
265/30ZR19	93 XL	W	9 1/2J	271	643	650	1433	340	50	7.2
275/40ZR19	101	W	9 1/2J	278	703	825	1819	300	44	7.2
225/35ZR20	90 XL	W	8J	230	666	600	1323	340	50	7.2
245/35ZR20	95 XL	W	8 1/2J	248	680	690	1521	340	50	7.2
245/40ZR20	95	W	8 1/2J	248	704	690	1521	300	44	7.2
245/45ZR20	99	W	8J	243	728	775	1709	300	44	7.2
275/30ZR20	93	W	9 1/2J	278	674	650	1433	300	44	7.2
275/35ZR20	98	W	9 1/2J	278	700	750	1653	300	44	7.2
275/40ZR20	106 XL	W	9 1/2J	278	728	950	2094	340	50	7.2
275/45ZR20	110 XL	W	9J	273	756	1060	2337	340	50	7.2
275/55R20	117 XL	V	8 1/2J	284	810	1285	2833	340	50	7.2
245/30ZR22	92 XL	W	8 1/2J	248	707	630	1389	340	50	7.2
245/35ZR22	97 XL	W	8 1/2J	248	731	730	1609	340	50	7.2
305/40ZR22	114 XL	W	11J	313	803	1180	2601	340	50	7.2

RUN FLAT

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
205/45RF17	84	W	7J	206	616	500	1102	300	44	7.2
205/50RF17	93 XL	W	6 1/2J	214	638	650	1433	340	51	7.2
225/45RF17	94 XL	W	7 1/2J	225	634	670	1477	340	51	7.2
225/50ZRF17	94	W	7J	233	658	670	1477	300	44	7.2
225/55RF17	97	W	7J	233	680	730	1609	300	44	7.2
225/40RF18	88	W	8J	230	637	560	1235	300	44	7.2
225/45ZRF18	91	W	7 1/2J	225	659	615	1356	300	44	7.2
235/55RF18	100	V	7 1/2J	245	715	800	1764	300	44	7.2
245/40ZRF18	93	W	8 1/2J	248	653	650	1433	300	44	7.2
245/45ZRF18	96	W	8J	243	677	710	1565	300	44	7.2
245/50ZRF18	100	W	7 1/2J	253	703	800	1764	300	44	7.2
245/45ZRF19	98	W	8J	243	703	750	1653	300	44	7.2
275/40ZRF19	101	W	9 1/2J	278	703	825	1819	300	44	7.2





## VANTI CS

- ©Optimized tread formula ensures excellent skid resistance on wet roads, and low rolling resistance on dry roads.
- ©Streamline transversal grooves ensure good wet traction and superior water evacuation.
- ©The designed pattern blocks ensure the driving power on various road surfaces.

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
255/70R15	108	H	7 1/2J	260	739	1000	2205	300	44	7.8
245/70R16	107	H	7J	248	750	975	2149	300	44	7.8
265/70R16	112	H	8J	272	778	1120	2469	300	44	7.8
275/70R16	114	H	8J	279	792	1180	2601	300	44	7.8
225/65R17	102	V	6 1/2J	228	724	850	1874	300	44	7.8
235/60R17	102	V	7J	240	714	850	1874	300	44	7.8
265/65R17	112	H	8J	272	776	1120	2469	300	44	7.8
275/65R17	115	H	8J	279	790	1215	2679	300	44	7.8
255/35ZR20	97 XL	W	9J	260	686	730	1609	340	50	7.8



Safety



Long Mileage



Handling



Braking





# TERRENA A/T

- ©Wide-angle lateral grooves ensure excellent on-and-off road performance.
- ©Unique pattern design reduces noise generation, improves driving stability and wet grip performance.
- ©Optimized tread compound contributes to good durability, good driving comfort, high traction on both dry and wet grounds.

SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
235/75R15	109XL	T	-	6 1/2J	235	733	1030	2271	-	-	340	50	8.2
31X10.50R15LT	109	S	6PR	8 1/2J	268	775	1030	2270	-	-	350	51	10.5
LT215/85R16	115/112	S	10PR	6J	216	772	1215	2680	1120	2470	550	80	10.5
LT225/75R16	115/112	S	10PR	6J	223	744	1215	2680	1120	2470	550	80	10.5
235/70R16	106	T	-	7J	240	736	950	2094	-	-	300	44	8.2
LT235/85R16	120/116	S	10PR	6 1/2J	235	806	1380	3042	1260	2778	550	80	10.5
LT245/75R16	120/116	S	10PR	7J	248	774	1380	3042	1260	2778	550	80	10.5
LT265/75R16	123/120	S	10PR	7 1/2J	267	804	1550	3415	1400	3085	550	80	10.5
LT285/75R16	122/119	S	8PR	8J	286	834	1500	3305	1360	3000	450	65	10.5
LT305/70R16	118/115	S	8PR	9J	311	834	1320	2910	1215	2680	350	50	10.5
235/65R17	104	T	-	7J	240	738	900	1984	-	-	300	44	8.2
LT265/70R17	121/118	S	10PR	8J	272	804	1450	3195	1320	2910	550	80	10.5
LT315/70R17	121/118	S	8PR	9 1/2J	323	874	1450	3195	1320	2910	350	50	10.5







# ADVENTURE A/T



◎Rectangle shoulder and wide tread design with 3D multiple thin sipes increases road contact area, provides superior handling on both wet and dry surfaces, and enhances wear-resisting performance.

◎Wide pyramidal-shaped sipes for all-weather and various roads delivers excellent safety, maintains firm grip performance and aquaplaning resistance on wet roads, and enhance soft-road steering response

◎Optimized pitching sequence blocks design offers quieter ride.

◎Unique lateral flange protector design enhances protection from puncture and impact damage.

SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
LT215/75R15	100/97	S	6PR	6J	216	703	800	1765	730	1610	350	50	11.6
LT235/75R15	116/113	S	10PR	6 1/2J	235	733	1250	2755	1150	2535	550	80	13.1
31X10.50R15LT	109	S	6PR	8 1/2 J	268	775	1030	2270	-	-	350	50	11.5
235/70R16	106	T	-	7J	240	736	950	2094	-	-	300	44	10.2
LT245/70R16	118/115	S	10PR	7J	248	750	1320	2910	1215	2680	550	80	11.5
LT245/75R16	120/116	S	10PR	7J	248	774	1380	3042	1260	2778	550	80	11.5
LT255/70R16	115/112	S	8PR	7 1/2J	260	764	1215	2680	1120	2470	450	65	11.5
LT265/70R16	121/118	S	10PR	8J	272	778	1450	3195	1320	2910	550	80	11.5
LT265/75R16	123/120	S	10PR	7 1/2J	267	804	1550	3415	1400	3085	550	80	11.5
LT285/75R16	122/119	S	8PR	8 J	286	834	1500	3305	1360	3000	450	65	12.1
225/65R17	106 XL	H	-	6 1/2J	228	724	950	2094	-	-	340	49	9.5
LT245/65R17	111/108	S	8PR	7J	248	750	1090	2405	1000	2205	450	65	11.5
LT245/70R17	119/116	S	10PR	7J	248	776	1360	3000	1250	2755	550	80	11.5
LT265/65R17	120/117	S	10PR	8J	272	776	1400	3085	1285	2835	550	80	11.5
LT285/70R17	121/118	S	8PR	8 1/2J	292	832	1450	3195	1320	2910	450	65	12.1
235/60R18	107 XL	H	-	7J	240	739	975	2149	-	-	340	49	9.5
LT265/60R18	119/116	S	10PR	8J	272	775	1360	3000	1250	2755	550	80	11.5
285/60R18	120 XL	H	-	8 1/2J	292	799	1400	3086	-	-	340	49	10.2
LT285/65R18	125/122	S	10PR	8 1/2J	292	827	1650	3640	1500	3305	550	80	12.1





## GRAND TOURER H/T


©Four wide longitudinal water-escaping grooves and spacious transverse water escaping grooves water to improve water dispersion for excellent traction and braking on wet roads. Powerful with the luxurious SUV-oriented UHP tyre.

©Outstanding performance on all roads with the wide tread and high groove-siperatio. Tranquil ride with the ideal pitch design and the variable sound frequency blocks. Special quality with good performance on anti-puncture, underlay-damage and anti-fracton from the unique sidewall protection layer.



SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
205/70R15	96	H	6J	209	669	710	1565	300	44	7.8
255/70R15	108	H	7 1/2J	260	739	1000	2205	300	44	8.1
215/65R16	98	H	6 1/2J	221	686	750	1653	300	44	7.8
225/70R16	103	H	6 1/2J	228	722	875	1929	300	44	7.8
235/60R16	100	V	7J	240	688	800	1764	300	44	7.8
235/70R16	106	H	7J	240	736	950	2094	300	44	8.1
255/70R16	111	H	7 1/2J	260	764	1090	2403	300	44	8.1
215/60R17	96	H	6 1/2J	221	690	710	1565	300	44	7.8
215/65R17	99	V	6 1/2J	221	712	775	1709	300	44	7.3
225/60R17	99	V	6 1/2J	228	702	775	1709	300	44	7.8
225/65R17	102	V	6 1/2J	228	724	850	1874	300	44	7.8
235/55R17	99	V	7 1/2J	245	690	775	1709	300	44	7.8
235/65R17	108 XL	V	7J	240	738	1000	2205	340	49	7.8
245/65R17	107	H	7J	248	750	975	2149	300	44	7.8
265/65R17	112	H	8J	272	776	1120	2469	300	44	7.8
275/55R17	109	H	8 1/2J	284	734	1030	2271	300	44	8.1
285/65R17	116	H	8 1/2J	292	802	1250	2756	300	44	8.1
215/55R18	95	V	7J	226	693	690	1521	300	44	7.8
225/55R18	98	V	7J	233	705	750	1653	300	44	7.8
225/60R18	100	H	6 1/2J	228	727	800	1764	300	44	7.8
235/55R18	100	V	7 1/2J	245	715	800	1764	300	44	7.8
235/60R18	107 XL	V	7J	240	739	975	2149	340	49	7.8
235/65R18	106	H	7J	240	763	950	2094	300	44	7.8
245/60R18	105	V	7J	248	751	925	2039	300	44	7.8
255/55ZR18	109 XL	W	8J	265	737	1030	2271	340	49	7.8
255/60R18	108	H	7 1/2J	260	763	1000	2205	300	44	7.8
255/70R18	113	H	7 1/2J	260	815	1150	2535	300	44	7.3
265/60R18	110	H	8J	272	775	1060	2337	300	44	7.8
265/65R18	114	H	8J	272	801	1180	2601	300	44	7.3
265/70R18	116	T	8J	272	829	1250	2756	300	44	8.1
225/55R19	99	V	7J	233	731	775	1709	300	44	7.8
235/45R19	95	V	8J	236	695	690	1521	300	44	7.8
235/50R19	99	V	7 1/2J	245	719	775	1709	300	44	7.8
235/55R19	105 XL	V	7 1/2J	245	741	925	2039	340	49	7.8
245/55ZR19	103	W	7 1/2J	253	753	875	1929	300	44	7.8
255/45R19	100	V	8 1/2J	255	713	800	1764	300	44	7.8
255/50ZR19	107 XL	W	8J	265	739	975	2149	340	49	7.8
255/55R19	111 XL	V	8J	265	763	1090	2403	340	49	7.8
265/50ZR19	110 XL	W	8 1/2J	277	749	1060	2337	340	49	7.8
275/55R19	111	W	8 1/2J	284	785	1090	2403	300	44	7.8
235/55R20	105 XL	V	7 1/2J	245	766	925	2039	340	49	7.3
265/45ZR20	104	W	9J	266	746	900	1984	300	44	7.8
265/50R20	111 XL	V	8 1/2J	277	774	1090	2403	340	49	7.3
275/50ZR20	113 XL	W	8 1/2J	284	784	1150	2535	340	49	7.8
275/60R20	115	H	8J	279	838	1215	2679	300	44	7.3
285/50R20	112	V	9J	297	794	1120	2469	300	44	7.3
265/45R21	108 XL	V	9J	266	771	1000	2205	340	49	7.8
275/45ZR21	110 XL	W	9J	273	781	1060	2337	340	49	7.3
275/50R21	113 XL	V	8 1/2J	284	809	1150	2535	340	49	7.3
275/50R22	111	V	8 1/2J	284	835	1090	2403	300	44	7.8



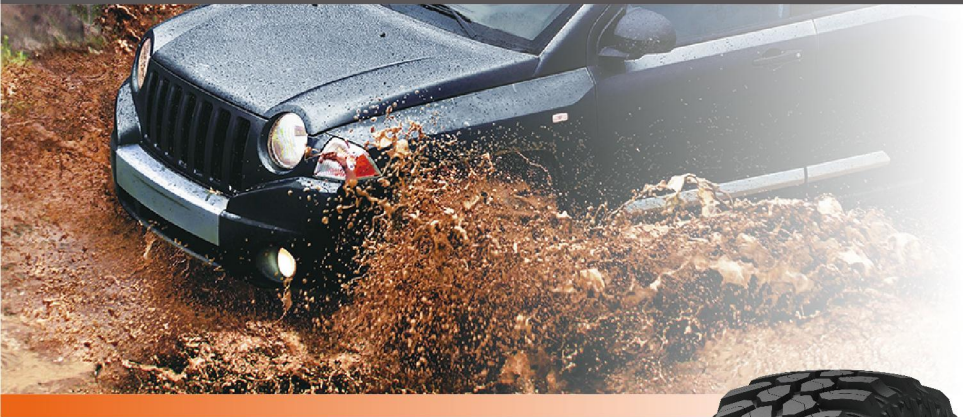

# TERRENA M/T

- ©Especially designed for unpaved tough roads.
- ©Various shoulder blocks promote driving and handling performance on tough roads..
- ©Perfect grip on tough surfaces such as mud and sand.

SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
31x10.50R15LT	109	Q	6PR	8 1/2J	268	775	1030	2270	-	-	350	50	14.6
33X12.50R15LT	108	Q	6PR	10J	318	826	1000	2205	-	-	250	35	14.6
LT235/75R16	117/114	Q	10PR	6 1/2J	235	758	1285	2835	1180	2600	550	80	14.6
LT235/85R16	120/116	N	10PR	6 1/2J	235	806	1380	3042	1260	2778	550	80	14.6
LT245/75R16	120/116	N	10PR	7J	248	774	1380	3042	1260	2778	550	80	14.6
LT265/75R16	123/120	N	10PR	7 1/2J	267	804	1550	3415	1400	3085	550	80	14.6
LT285/75R16	122/119	Q	8PR	8J	286	834	1500	3305	1360	3000	450	65	14.6
LT265/70R17	121/118	Q	10PR	8J	272	804	1450	3195	1320	2910	550	80	14.6
LT285/70R17	121/118	Q	8PR	8 1/2J	292	832	1450	3195	1320	2910	450	65	14.6
35X12.50R17LT	119	Q	8PR	10J	318	877	1360	3000	-	-	350	50	14.6
LT275/70R18	125/122	Q	10PR	8J	279	843	1650	3640	1500	3305	550	80	14.6
35X12.50R18LT	123	Q	10PR	10J	318	877	1550	3415	-	-	450	65	14.6
35X12.50R20LT	121	Q	10PR	10J	318	877	1450	3195	-	-	450	65	14.6





# VANTI WINTER

- ◎ Two wide main grooves and wide tread design ensures a superior handling performance on ice and snow ground.
- ◎ Sawtooth-shaped design on the tread guarantees excellent braking performance on ice and snow.
- ◎ Advanced silica compound offers enhanced traction and balance in winter driving conditions.
- ◎ Directional, v-shaped tread pattern improves water evacuation and enhances winter traction.



SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
165/70R13	79	HT	5.00B	170	562	437	963	300	44	8.0
175/70R13	82	T	5.00B	177	576	475	1047	300	44	8.1
175/65R14	86 XL	T	5J	177	584	530	1168	340	50	8.1
185/60R14	82	H	5 1/2J	189	578	475	1047	300	44	8.2
185/65R14	90 XL	H	5 1/2J	189	596	600	1323	340	50	8.2
185/70R14	88	T	5 1/2J	189	616	560	1235	300	44	8.2
185/65R15	88	H	5 1/2J	189	621	560	1235	300	44	8.2
195/55R15	85	T	6J	201	595	515	1135	300	44	8.3
195/60R15	88	H	6J	201	615	560	1235	300	44	8.3
195/65R15	91	H	6J	201	635	615	1356	300	44	8.3
205/65R15	94	T	6J	209	647	670	1477	300	44	8.4
205/70R15	96	T	6J	209	669	710	1565	300	44	8.4
215/70R15	98	T	6 1/2J	221	683	750	1653	300	44	8.5
215/75R15	100	T	6J	216	703	800	1764	300	44	8.5
205/55R16	94 XL	H	6 1/2J	214	632	670	1477	340	50	7.8
215/55R16	97 XL	V	7J	226	642	730	1609	340	50	8.5
215/60R16	99 XL	H	6 1/2J	221	664	775	1709	340	50	8.5
215/65R16	98	H	6 1/2J	221	686	750	1653	300	44	8.5
215/70R16	100	H	6 1/2J	221	708	800	1764	300	44	8.5
225/60R16	102 XL	H	6 1/2J	228	676	850	1874	340	50	8.6
235/70R16	109 XL	H	7J	240	736	1030	2271	340	50	8.7
255/65R16	109	H	7 1/2J	260	738	1030	2271	300	44	8.9
215/55R17	98 XL	V	7J	226	668	750	1653	340	50	8.5
215/60R17	96	H	6 1/2J	221	690	710	1565	300	44	8.5
225/45R17	94 XL	V	7 1/2J	225	634	670	1477	340	50	8.6
225/50R17	98 XL	V	7J	233	658	750	1653	340	50	8.6
225/55R17	101 XL	V	7J	233	680	825	1819	340	50	8.6
225/60R17	99	H	6 1/2J	228	702	775	1709	300	44	8.6
225/65R17	102	H	6 1/2J	228	724	850	1874	300	44	8.6
235/55R17	103 XL	V	7 1/2J	245	690	875	1929	340	50	8.7
235/65R17	108 XL	V	7J	240	738	1000	2205	340	50	8.7
225/40R18	92 XL	V	8J	230	637	630	1389	340	50	8.6
225/45R18	95 XL	V	7 1/2J	225	659	690	1521	340	50	8.6
235/40R18	95 XL	V	8 1/2J	241	645	690	1521	340	50	8.7
235/45R18	98 XL	V	8J	236	669	750	1653	340	50	8.7
235/60R18	107 XL	V	7J	240	739	975	2149	340	50	8.7
255/55R18	109 XL	H	8J	265	737	1030	2271	340	50	8.9





# SNOW CUTTER

- ©Serrated design in the outside main-groove assures high grip and braking force on ICE&SNOW covered surfaces.
- ©Deep and densely distributed grooves and steel sheet helps soften the tread, contributes to shorten braking distance on ice covered surface.

SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
175/70R13	82	T	-	5.00B	177	576	475	1047	-	-	300	44	9.9
175/65R14	82	T	-	5J	177	584	475	1047	-	-	300	44	9.9
185/65R14	90XL	T	-	5 1/2J	189	596	600	1323	-	-	340	50	9.9
185/65R15	88	T	-	5 1/2J	189	621	560	1235	-	-	300	44	9.9
195/60R15	88	T	-	6J	201	615	560	1235	-	-	300	44	9.9
195/65R15	91	T	-	6J	201	635	615	1356	-	-	300	44	9.9
205/65R15	94	T	-	6J	209	647	670	1477	-	-	300	44	9.9
205/70R15	96	T	-	6J	209	669	710	1565	-	-	300	44	9.9
215/70R15	98	T	-	6 1/2J	221	683	750	1653	-	-	300	44	9.9
205/55R16	91	T	-	6 1/2J	214	632	615	1356	-	-	300	44	9.9
205/55R16	94XL	T	-	6 1/2J	214	632	670	1477	-	-	340	50	9.9
205/60R16	92	T	-	6J	209	652	630	1389	-	-	300	44	9.9
215/60R16	95	T	-	6 1/2J	221	664	690	1521	-	-	300	44	9.9
215/65R16	98	T	-	6 1/2J	221	686	750	1653	-	-	300	44	9.9
215/70R16	100	T	-	6 1/2J	221	708	800	1764	-	-	300	44	10.7
225/60R16	102XL	T	-	6 1/2J	228	676	850	1874	-	-	340	50	9.9
235/70R16	109XL	T	-	7J	240	736	1030	2271	-	-	340	50	10.7
LT245/75R16	120/116	Q	10PR	7J	248	774	1380	3040	1260	2780	550	80	13.1
225/65R17	102	T	-	6 1/2J	228	724	850	1874	-	-	300	44	10.7
235/65R17	104	T	-	7J	240	738	900	1984	-	-	300	44	10.7
245/45R17	95	T	-	8J	243	652	690	1521	-	-	300	44	9.9
265/70R17	115	T	-	8J	272	804	1215	2679	-	-	300	44	10.7
LT265/70R17	121/118	Q	10PR	8J	272	804	1450	3195	1320	2910	550	80	13.1



Handling



Braking

# Winter Tire

PASSION FOR PERFECTION



## WINTER 621

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
155/65R13	73	T	4 1/2J	157	532	365	805	300	44	8.7
175/70R14	84	T	5J	177	602	500	1102	300	44	8.7
185/60R14	82	T	5 1/2J	189	578	475	1047	300	44	8.7
185/70R14	88	T	5 1/2J	189	616	560	1235	300	44	8.5
185/60R15	84	T	5 1/2J	189	603	500	1102	300	44	8.7
185/65R15	88	T	5 1/2J	189	621	560	1235	300	44	8.5
195/55R15	85	T	6J	201	595	515	1135	300	44	8.5
195/60R15	88	T	6J	201	615	560	1235	300	44	8.5
195/65R15	91	T	6J	201	635	615	1356	300	44	8.7
195/55R16	87	T	6J	201	620	545	1201	300	44	8.7
195/60R16	89	T	6J	201	640	580	1279	300	44	8.5
205/55R16	90	T	6 1/2J	214	632	600	1323	300	44	8.7
205/60R16	92	T	6J	209	652	630	1389	300	44	8.7
215/60R16	95	T	6 1/2J	221	664	690	1521	300	44	8.7
225/55R16	95	T	7J	233	654	690	1521	300	44	8.5
205/50R17	89	T	6 1/2J	214	638	580	1279	300	44	8.5
205/55R17	91	H	6 1/2J	214	658	615	1356	300	44	8.5
215/50R17	91	T	7J	226	648	615	1356	300	44	8.7
215/55R17	94	T	7J	226	668	670	1477	300	44	8.5
225/50R17	94	T	7J	233	658	670	1477	300	44	8.5
225/55R17	97	T	7J	233	680	730	1609	300	44	8.5
245/45R17	95	T	8J	243	652	690	1521	300	44	8.7
225/50R18	95	H	7J	233	683	690	1521	300	44	8.5
245/45R18	96	T	8J	243	677	710	1565	300	44	8.7
245/45R19	102 XL	H	8J	243	703	850	1874	340	50	8.5
255/45R19	100	H	8 1/2J	255	713	800	1764	300	44	8.5



Handling



Braking



Drainage



# Winter Tire

PASSION FOR PERFECTION



## WINTER 626

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
235/75R15	105	T	6 1/2J	235	733	925	2039	300	44	9.0
215/65R16	98	T	6 1/2J	221	686	750	1653	300	44	8.8
235/70R16	109 XL	T	7J	240	736	1030	2271	340	50	9.1
265/70R16	112	T	8J	272	778	1120	2469	300	44	9.0
215/60R17	96	T	6 1/2J	221	690	710	1565	300	44	8.8
225/60R17	99	T	6 1/2J	228	702	775	1709	300	44	8.8
225/65R17	102	T	6 1/2J	228	724	850	1874	300	44	8.8
245/65R17	107	T	7J	248	750	975	2149	300	44	9.0
265/65R17	112	T	8J	272	776	1120	2469	300	44	9.0
215/55R18	95	T	7J	226	693	690	1521	300	44	9.0
225/55R18	98	T	7J	233	705	750	1653	300	44	8.5
225/60R18	100	T	6 1/2J	228	727	800	1764	300	44	8.8
235/50R18	97	T	7 1/2J	245	693	730	1609	300	44	9.0
235/55R18	100	T	7 1/2J	245	715	800	1764	300	44	9.0
235/60R18	103	T	7J	240	739	875	1929	300	44	8.8
235/65R18	106	T	7J	240	763	950	2094	300	44	8.8
245/60R18	105	T	7J	248	751	925	2039	300	44	8.8
265/60R18	110	H	8J	272	775	1060	2337	300	44	8.8
225/55R19	99	H	7J	233	731	775	1709	300	44	8.5
235/50R19	99	H	7 1/2J	245	719	775	1709	300	44	8.8
235/55R19	101	T	7 1/2J	245	741	825	1819	300	44	9.0
245/55R19	103	T	7 1/2J	253	753	875	1929	300	44	9.0
255/50R19	107 XL	H	8J	265	739	975	2149	340	50	8.8
255/55R19	111 XL	H	8J	265	763	1090	2403	340	50	8.8
235/45R20	100 XL	H	8J	236	720	800	1764	340	49	8.5
275/40R20	106 XL	H	9 1/2J	278	728	950	2094	340	50	8.8
275/45R20	110 XL	H	9J	273	756	1060	2337	340	50	8.8



Handling



Braking



Drainage

# WINTER 628



## ST RADIAL

- ◎ Provide good water dispersion for superior wet traction and the reinforced, carcass enhance highspeed durability.
- ◎ Super structure and special profile provide high load capacity.
- ◎ Lateral sipes in the tread blocks provide all-season grip through out the life of the tyres.

SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
175R14LT	94/92	S	6PR	5J	177	634	670	1477	630	1389	350	51	8.4
185R14C	102/100	Q	8PR	5 1/2J	188	650	850	1875	800	1765	450	65	8.4
185R15C	103/102	Q	8PR	5 1/2J	189	677	875	1929	850	1874	450	65	8.4
195/70R15C	99/96	R	8PR	6J	201	655	775	1710	710	1565	450	65	10.2
6.50R16C	107/102	M	10PR	5.50F	185	750	975	2150	850	1875	560	81	9.7
7.00R16C	111/107	M	10PR	5.50F	200	775	1090	2405	975	2150	560	81	10.7

SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
ST175/80R13	91/87	L	6PR	5J	177	610	615	1360	545	1200	350	51	7.1
ST205/75R14	105/101	L	8PR	5 1/2J	2003	664	925	2040	825	1820	450	65	7.6
ST215/75R14	102/98	L	6PR	6J	216	678	850	1870	750	1650	350	51	7.6
ST205/75R15	107/102	L	8PR	5 1/2J	203	689	975	2150	850	1870	450	65	7.6
ST225/75R15	117/112	L	10PR	6J	223	719	1285	2830	1120	2470	550	80	7.6
ST235/80R16	123/119	L	10PR	6 1/2J	235	782	1550	3420	1360	3000	550	80	7.8



# New Energy Tire

PASSION FOR PERFECTION



SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LAOD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
205/50ZR17	93 XL	W	6½J	214	638	650	1433	340	49	8.4
215/50R17	95 XL	V	7J	226	648	690	1521	340	49	8.4
215/55R17	94	V	7J	226	668	670	1477	300	44	8.4
235/45ZR18	98 XL	W	8J	236	669	750	1653	340	49	7.0
235/40R19	92	V	8½J	241	671	630	1389	300	44	7.0
235/50R19	103 XL	V	7½J	245	719	875	1929	340	49	7.0
245/45ZR19	102 XL	W	8J	243	703	850	1874	340	49	7.0
255/45ZR19	104 XL	W	8½J	255	713	900	1984	340	49	7.0
255/50R20	109 XL	V	8J	265	764	1030	2271	340	49	7.0

## e.VANTI EV7



- Safety
- Long Mileage
- Handling
- Braking

