

GRENLANDER

PCR^{TIRE} CATALOGUE

GRENLANDER



ZODO TIRE


ZODO TIRE CO., LIMITED

Web: en.zodotire.cn

E-mail: export@zodotire.cn

GRENLANDER



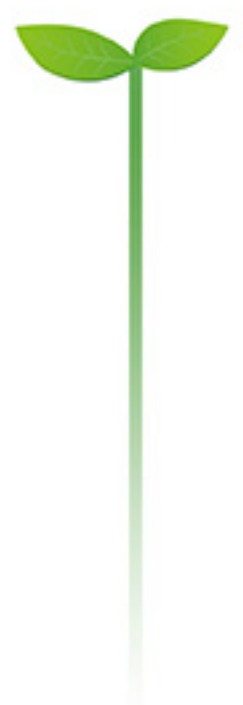

GRENLANDER

GREENLANDER


FOR GREEN LAND *Tire*

A winding road layout for passenger cars and SUVs. The road starts at the top left, curves right, then left, then right, then left, and finally curves down to the bottom right. Blue directional signs indicate the flow: HP (left), UHP (left), RFT (left), A/S (right), and WINTER (left). Small car icons are placed on the road to represent different vehicle types.

01	03	05	07	
COLO HO1	L-GRIP16	L-COMFORT68	COLO HO2	
09	11	13	15	
L-ZEAL 56	ENRI U08	DIAS ZERO	L-ZEAL 56 (RFT)	
25	27			
GREENTOUR A/S	GREENWING A/S			
45	47	49	51	53
ICEHAWKE I	ICEHAWKE II	WINTER GL868	L-SNOW96	WINTER GL989

A road layout for vans, SUVs, and trailers. The road starts at the top right, curves left, then right, then left, then right, and finally curves down to the bottom right. Blue directional signs indicate the flow: VAN (right), A/T (right), M/T (right), H/T (right), and TRAILER (right). Small vehicle icons are placed on the road to represent different vehicle types.

17	19	21	23	
L-MAX9	L-STRONG36	L-POWER28	MULTIWAYS 52	
35	37	39	41	43
MAGA A/T ONE	MAGA A/T TWO	L-OFFROAD76	PREDATOR M/T	DRAK M/T
29	31	33		55
MAHO 77	L-FINDER78	MAHO 79		L-TRAVEL18

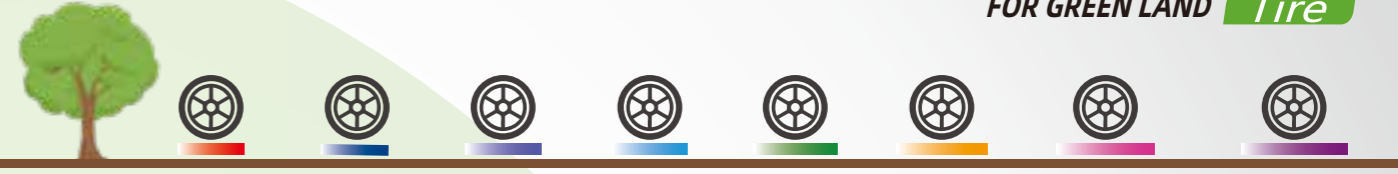

HP UHP RFT VAN A/S SUV WINTER TRAILER



Shark fin design


Shark fin design, remain rigidity of the tread while improving drainage performance, reducing noise and ensuring the uniformity of the tire.



Driveability

Low-noise grooves


Equal sipes within grooves. The 6 horizontal equal sipes within grooves effectively eliminate the bump noise, improve the rigidity between tread blocks, and possess a good stone removing and self-cleaning effect.

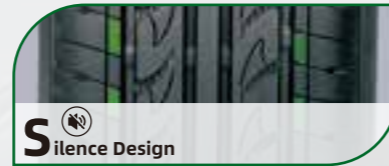

Silence Design

Enhanced tread


Enhanced tread design. Small knurl pattern on the top of the tread effectively reduce the noise between new tire and the whole car during run-in period, and improve handling and safety performance.

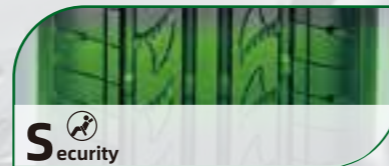

Security

Anti-slip grooves

Four wide vertical drainage grooves. Four wide vertical drainage grooves provide great wetland grip ability, preventing lateral slip on wetland.

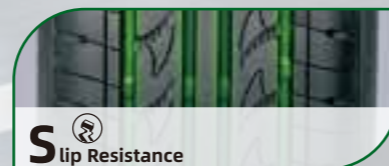

Slip Resistance

Size	LI/SI	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall	Treadwear	Traction	Temp. Resist.
					(kg)	(Lbs)						
145/70R12	69T	4.50B	150	509	325	716	300/44	420/A/A	BSW	YES	YES	YES
155/65R13	73T	4.50B	157	532	365	805	300/44	420/A/A	BSW	YES	YES	YES
155/70R13	75T	4.50B	157	548	387	853	300/44	420/A/A	BSW	YES	YES	YES
155/80R13	79T	4.50B	157	578	437	963	300/44	420/A/A	BSW	YES	YES	YES
165/65R13	77T	5.00B	170	544	412	908	300/44	420/A/A	BSW	YES	YES	YES
165/65R13	77H	5.00B	170	544	412	908	300/44	420/A/A	BSW	YES	YES	YES
165/70R13	79H	5.00B	170	562	437	963	300/44	420/A/A	BSW	YES	YES	YES
165/70R13	79T	5.00B	170	562	437	963	300/44	420/A/A	BSW	YES	YES	YES
165/80R13	83T	4.50B	165	594	487	1074	300/44	420/A/A	BSW	YES	YES	YES
175/60R13	77T	5.00B	177	540	412	908	300/44	420/A/A	BSW	YES	YES	YES
175/65R13	80T	5.00B	177	558	450	992	300/44	420/A/A	BSW	YES	YES	YES
175/70R13	82T	5.00B	177	576	475	1047	300/44	420/A/A	BSW	YES	YES	YES
175/75R13	84T	5.00B	177	594	500	1102	300/44	420/A/A	BSW	YES	YES	YES
185/70R13	86T	5.50B	189	590	530	1168	300/44	420/A/A	BSW	YES	YES	YES
155/65R14	75T	4 1/2J	157	558	387	853	300/44	420/A/A	BSW	YES	YES	YES
165/60R14	75H	5J	170	554	387	853	300/44	420/A/A	BSW	YES	YES	YES
165/65R14	79T	5J	170	570	437	963	300/44	420/A/A	BSW	YES	YES	YES
165/65R14	79H	5J	170	570	437	963	300/44	420/A/A	BSW	YES	YES	YES
165/70R14	81T	5J	170	588	462	1019	300/44	420/A/A	BSW	YES	YES	YES
165/70R14	81H	5J	170	588	462	1019	300/44	420/A/A	BSW	YES	YES	YES
165/70R14	81S	5J	170	588	462	1019	300/44	420/A/A	BSW	YES	YES	YES
175/60R14	79H	5J	177	566	437	963	300/44	420/A/A	BSW	YES	YES	YES
175/65R14	82T	5J	177	584	475	1047	300/44	420/A/A	BSW	YES	YES	YES
175/65R14	86T	5J	177	584	530	1168	340/50	420/A/A	BSW	YES	YES	YES
175/70R14	88T	5J	177	602	560	1235	340/50	420/A/A	BSW	YES	YES	YES
175/70R14	84T	5J	177	602	500	1102	300/44	420/A/A	BSW	YES	YES	YES
175/75R14	86T	5J	177	618	530	1168	300/44	420/A/A	BSW	YES	YES	YES
185/60R14	82H	5 1/2J	189	578	475	1047	300/44	420/A/A	BSW	YES	YES	YES
185/65R14	86T	5 1/2J	189	596	530	1168	300/44	420/A/A	BSW	YES	YES	YES
185/70R14	88T	5 1/2J	189	616	560	1235	300/44	420/A/A	BSW	YES	YES	YES
195/60R14	86T	6J	201	590	530	1168	300/44	420/A/A	BSW	YES	YES	YES
195/70R14	91T	6J	201	630	615	1356	300/44	420/A/A	BSW	YES	YES	YES
205/60R14	88T	6J	209	602	560	1235	300/44	420/A/A	BSW	YES	YES	YES
205/70R14	98T	6J	209	644	750	1653	340/50	420/A/A	BSW	YES	YES	YES
205/70R15	96T	6J	209	669	710	1565	300/44	420/A/A	BSW	YES	YES	YES
205/70R15	100H	6J	209	669	800	1764	340/50	420/A/A	BSW	YES	YES	YES

L-COMFORT68

ST WINTER MT AT HT A/S VAN RFT UHP HP




Streamlined grooves

Streamlined horizontal grooves design, improve smooth and high-speed ability, provide a low-noise and comfortable ride.




Shoulder design

Big block design on shoulder. Ultra-big block design on shoulder improve handling ability, open horizontal grooves provide great wetland drainage.

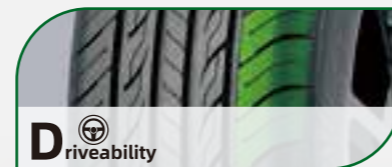


Louver design

Louver design on shoulder. Staged louvers on shoulder improve driving safety, semi through slips reduce noise.

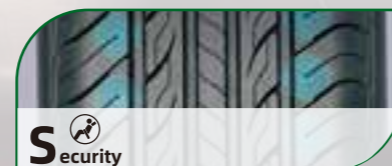

Anti-slip grooves

Four wide vertical drainage grooves. Four wide vertical drainage grooves provide great wetland grip ability, preventing lateral slip on wetland.

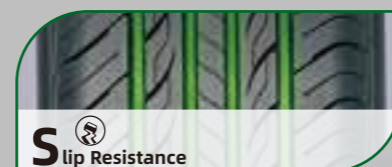

Size	LI/SI	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall	Treadwear	Traction	Temp. Resist.
					(kg)	(Lbs)						
155/70R12	73T	4.5	157	523	365	805	300/44	380/A/A	BSW	YES	YES	YES
175/65R14	82H	5J	177	584	475	1047	300/44	380/A/A	BSW	YES	YES	YES
185/55R14	80H	6J	194	560	450	992	300/44	380/A/A	BSW	YES	YES	YES
185/60R14	82H	5 1/2J	189	578	475	1047	300/44	380/A/A	BSW	YES	YES	YES
185/65R14	86H	5 1/2J	189	596	530	1168	300/44	380/A/A	BSW	YES	YES	YES
215/70R14	96H	6 1/2J	221	658	710	1565	300/44	380/A/A	BSW	YES	YES	YES
175/60R15	81H	5J	177	591	462	1019	300/44	380/A/A	BSW	YES	YES	YES
175/65R15	84H	5J	177	609	500	1102	300/44	380/A/A	BSW	YES	YES	YES
185/55R15	82V	6J	194	585	475	1047	300/44	380/A/A	BSW	YES	YES	YES
185/60R15	88H	5 1/2J	189	603	560	1235	340/50	380/A/A	BSW	YES	YES	YES
185/60R15	84H	5 1/2J	189	603	500	1102	300/44	380/A/A	BSW	YES	YES	YES
185/65R15	88H	5 1/2J	189	621	560	1235	300/44	380/A/A	BSW	YES	YES	YES
195/50R15	82H	6J	201	577	475	1047	300/44	380/A/A	BSW	YES	YES	YES
195/50R15	82V	6J	201	577	475	1047	300/44	380/A/A	BSW	YES	YES	YES
195/55R15	85V	6J	201	595	515	1135	300/44	380/A/A	BSW	YES	YES	YES
195/60R15	88V	6J	201	615	560	1235	300/44	380/A/A	BSW	YES	YES	YES
195/60R15	88H	6J	201	615	560	1235	300/44	380/A/A	BSW	YES	YES	YES
195/65R15	91V	6J	201	635	615	1356	300/44	380/A/A	BSW	YES	YES	YES
195/65R15	95H	6J	201	635	690	1521	340/50	380/A/A	BSW	YES	YES	YES
195/65R15	91H	6J	201	635	615	1356	300/44	380/A/A	BSW	YES	YES	YES
205/60R15	91H	6J	209	627	615	1356	300/44	380/A/A	BSW	YES	YES	YES
205/60R15	91V	6J	209	627	615	1356	300/44	380/A/A	BSW	YES	YES	YES
205/65R15	94V	6J	209	647	670	1477	300/44	380/A/A	BSW	YES	YES	YES
205/65R15	94H	6J	209	647	670	1477	300/44	380/A/A	BSW	YES	YES	YES
215/65R15	96V	6 1/2J	221	661	710	1565	300/44	380/A/A	BSW	YES	YES	YES
215/65R15	100H	6 1/2J	221	661	800	1764	340/50	380/A/A	BSW	YES	YES	YES
215/70R15	98T	6 1/2J	221	683	750	1653	300/44	380/A/B	BSW	YES	YES	YES
235/70R15	103T	7J	240	711	875	1929	300/44	380/A/B	BSW	YES	YES	YES
185/50R16	81V	6J	194	592	462	1018	300/44	380/A/A	BSW	YES	YES	YES
185/55R16	83V	6J	194	610	487	1074	300/44	380/A/A	BSW	YES	YES	YES
195/55R16	87V	6J	201	620	545	1201	300/44	380/A/A	BSW	YES	YES	YES
195/55R16	91W	6J	201	620	615	1356	340/50	380/A/A	BSW	YES	YES	YES
195/60R16	89H	6J	201	640	580	1279	300/44	380/A/A	BSW	YES	YES	YES
205/55R16	91V	6 1/2J	214	632	615	1356	300/44	380/A/A	BSW	YES	YES	YES
205/60R16	92V	6J	209	652	630	1389	300/44	380/A/A	BSW	YES	YES	YES
205/65R16	95T	6J	209	672	690	1521	300/44	380/A/B	BSW	YES	YES	YES
215/60R16	95V	6 1/2J	221	664	690	1521	300/44	380/A/A	BSW	YES	YES	YES
215/60R16	99V	6 1/2J	221	664	775	1709	340/50	380/A/A	BSW	YES	YES	YES
215/60R16	99H	6 1/2J	221	664	775	1709	340/50	380/A/A	BSW	YES	YES	YES
215/65R16	98H	6 1/2J	221	686	750	1653	300/44	380/A/A	BSW	YES	YES	YES
225/60R16	98V	6 1/2J	228	676	750	1653	300/44	380/A/A	BSW	YES	YES	YES
225/65R16	100T	6 1/2J	228	698	800	1764	300/44	380/A/B	BSW	YES	YES	YES
235/60R16	100H	7J	240	688	800	1764	300/44	380/A/A	BSW	YES	YES	YES
235/65R16	103T	7J	240	712	875	1930	300/44	380/A/B	BSW	YES	YES	YES
215/55R17	94V	7J	226	668	670	1477	300/44	380/A/A	BSW	YES	YES	YES
215/60R17	96T	6 1/2J	221	690	710	1565	300/44	380/A/B	BSW	YES	YES	YES
215/65R17	99T	6 1/2J	221	712	775	1709	300/44	380/A/B	BSW	YES	YES	YES
225/60R17	99H	6 1/2J	228	702	775	1709	300/44	380/A/B	BSW	YES	YES	YES
225/65R17	102H	6 1/2J	228	724	850	1874	300/44	380/A/A	BSW	YES	YES	YES
235/65R17	104H	7J	240	738	900	1984	300/44	380/A/A	BSW	YES	YES	YES

* New Developing Sizes / The Labeling Information Is Subject To Change

Asymmetrical pattern design, balanced and optimized pattern groove design

This design full of personality can improve excellent handling performance and give people an extraordinary double-sided charm visual experience. And also effectively reduce noise and improve tire comfort.




Wide longitudinal groove design

The wide longitudinal grooves can drain water quickly, effectively avoiding tire slipping on wet roads and improving wet handling.




Break through the traditional design of the lateral groove on the inner shoulder

It can reduce the rigidity of the tire shoulders, effectively suppress eccentric wear, block the transmission of noise from the central block, reduce tire noise, and bring excellent driving comfort.

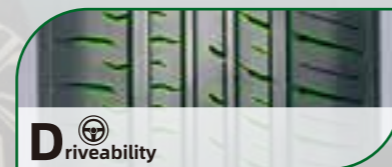

Special hook groove design on outer shoulder

It can effectively reduce heat generation at the shoulder, reduce resonance during driving, and effectively reduce tire noise.



Size	LI/SI	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall	Treadwear	Traction	Temp. Resist.
					(kg)	(Lbs)						
155/65R13	73T	4.50B	157	532	365	805	300/44	400/A/A	BSW	YES	YES	YES
155/70R13	75T	4.50B	157	548	387	853	300/44	400/A/A	BSW	YES	YES	YES
155/80R13	79T	4.50B	157	578	437	963	300/44	400/A/A	BSW	YES	YES	YES
165/65R13	77T	5.00B	170	544	412	908	300/44	400/A/A	BSW	YES	YES	YES
175/70R13	82T	5.00B	177	576	475	1047	300/44	400/A/A	BSW	YES	YES	YES
155/65R14	75T	4.50B	157	558	387	853	300/44	400/A/A	BSW	YES	YES	YES
165/60R14	75H	5.00B	170	554	387	853	300/44	400/A/A	BSW	YES	YES	YES
165/70R14	85TXL	5.00B	170	588	515	1135	340/50	400/A/A	BSW	YES	YES	YES
165/70R14	81T	5.00B	170	588	462	1019	300/44	400/A/A	BSW	YES	YES	YES
175/60R14	79H	5.00B	177	566	437	963	300/44	400/A/A	BSW	YES	YES	YES
175/65R14	86TXL	5.00B	177	584	530	1168	340/50	400/A/A	BSW	YES	YES	YES
175/65R14	82H	5.00B	177	584	475	1047	300/44	400/A/A	BSW	YES	YES	YES
175/70R14	88TXL	5.00B	177	602	560	1235	340/50	400/A/A	BSW	YES	YES	YES
175/70R14	84T	5.00B	177	602	500	1102	300/44	400/A/A	BSW	YES	YES	YES
185/50R14	77V	6J	194	542	412	908	300/44	400/A/A	BSW	YES	YES	YES
185/55R14	80H	6J	194	560	450	992	300/44	400/A/A	BSW	YES	YES	YES
185/60R14	82H	5 1/2J	189	578	475	1047	300/44	400/A/A	BSW	YES	YES	YES
185/65R14	86H	5 1/2J	189	596	530	1168	300/44	400/A/A	BSW	YES	YES	YES
185/70R14	88T	5 1/2J	189	616	560	1235	300/44	400/A/A	BSW	YES	YES	YES
195/65R14	89H	6J	201	610	580	1279	300/44	400/A/A	BSW	YES	YES	YES
155/60R15	74T	4.50B	157	567	375	827	300/44	400/A/A	BSW	YES	YES	YES
165/60R15	81HXL	5.00B	170	579	462	1019	340/50	400/A/A	BSW	YES	YES	YES
165/65R15	81H	5J	170	595	462	1019	300/44	400/A/A	BSW	YES	YES	YES
175/55R15	77H	5 1/2J	182	573	412	908	300/44	400/A/A	BSW	YES	YES	YES
175/60R15	81H	5J	177	591	462	1019	300/44	400/A/A	BSW	YES	YES	YES
175/65R15	84H	5J	177	609	500	1102	300/44	400/A/A	BSW	YES	YES	YES
185/55R15	82V	6J	194	585	475	1047	300/44	400/A/A	BSW	YES	YES	YES
185/60R15	88HXL	5 1/2J	189	603	560	1235	340/50	400/A/A	BSW	YES	YES	YES
185/60R15	84H	5 1/2J	189	603	500	1102	300/44	400/A/A	BSW	YES	YES	YES
185/65R15	92TXL	5 1/2J	189	621	630	1389	340/50	400/A/A	BSW	YES	YES	YES
185/65R15	88H	5 1/2J	189	621	560	1235	300/44	400/A/A	BSW	YES	YES	YES
195/50R15	82V	6J	201	577	475	1047	300/44	400/A/A	BSW	YES	YES	YES
195/55R15	85V	6J	201	595	515	1135	300/44	400/A/A	BSW	YES	YES	YES
195/60R15	88V	6J	201	615	560	1235	300/44	400/A/A	BSW	YES	YES	YES
195/60R15	88H	6J	201	615	560	1235	300/44	400/A/A	BSW	YES	YES	YES
195/65R15	95TXL	6J	201	635	690	1521	340/50	400/A/A	BSW	YES	YES	YES
195/65R15	91V	6J	201	635	615	1356	300/44	400/A/A	BSW	YES	YES	YES
205/60R15	91V	6J	209	627	615	1356	300/44	400/A/A	BSW	YES	YES	YES
205/65R15	94V	6J	209	647	670	1477	300/44	400/A/A	BSW	YES	YES	YES
215/65R15	96H	6 1/2J	221	661	710	1565	300/44	400/A/A	BSW	YES	YES	YES
175/50R16	77V	5 1/2J	182	582	412	908	300/44	400/A/A	BSW	YES	YES	YES
185/50R16	81V	6J	194	592	462	1019	300/44	400/A/A	BSW	YES	YES	YES
185/55R16	87VXL	6J	194	610	545	1202	340/50	400/A/A	BSW	YES	YES	YES
185/55R16	83H	6J	194	610	487	1074	300/44	400/A/A	BSW	YES	YES	YES
195/50R16	88VXL	6J	201	602	560	1235	340/50	400/A/A	BSW	YES	YES	YES
195/55R16	91VXL	6J	201	620	615	1356	340/50	400/A/A	BSW	YES	YES	YES
205/50R16	91WXL	6 1/2J	214	612	615	1356	340/50	400/A/A	BSW	YES	YES	YES
205/50R16	87W	6 1/2J	214	612	545	1202	300/44	400/A/A	BSW	YES	YES	YES
205/55R16	94WXL	6 1/2J	214	632	670	1477	340/50	400/A/A	BSW	YES	YES	YES
205/55R16	91V	6 1/2J	214	632	615	1356	300/44	400/A/A	BSW	YES	YES	YES
205/60R16	96VXL	6J	209	652	710	1565	340/50	400/A/A	BSW	YES	YES	YES
205/60R16	92V	6J	209	652	630	1389	300/44	400/A/A	BSW	YES	YES	YES
215/55R16	97WXL	7J	226	642	730	1609	340/50	400/A/A	BSW	YES	YES	YES
215/60R16	99HXL	6 1/2J	221	664	775	1709	340/50	400/A/A	BSW	YES	YES	YES
215/60R16	95V	6 1/2J	221	664	690	1521	300/44	400/A/A	BSW	YES	YES	YES
215/65R16	102HXL	6 1/2J	221	686	850	1874	340/50	400/A/A	BSW	YES	YES	YES
215/65R16	98H	6 1/2J	221	686	750	1653	300/44	400/A/A	BSW	YES	YES	YES
225/55R16	99WXL	7J	233	654	775	1709	340/50	400/A/A	BSW	YES	YES	YES
225/60R16	102VXL	6 1/2J	228	676	850	1874	340/50	400/A/A	BSW	YES	YES	YES
225/60R16	98H	6 1/2J	228	676	750	1653	300/44	400/A/A	BSW	YES	YES	YES


Asymmetric tread pattern

Asymmetric tread pattern design and functionally differed in medial and lateral sidewall improve steering performance in wet road conditions, and ensure high-speed stability.



— Silicon-containing tread compound

New silicon-containing tread compound enhance grip in wet road and reduce rolling resistance.




— Low-noise design

Creative tread grooves' fine lines design effectively reduce noise at high-speed driving.



— Anti-slip design

A mass of steel sheets and grooves design provide great grip ability and driving performance on wetland.




Size	LI/SI	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
					(kg)	(Lbs)						
195/45R16	84V XL	6 1/2J	195	582	500	1102	340/50	400/A/A	BSW	YES	YES	YES
205/45R16	87W XL	7 J	206	590	545	1201	340/50	400/A/A	BSW	YES	YES	YES
205/50R16	91W XL	6 1/2J	214	612	615	1356	340/50	400/A/A	BSW	YES	YES	YES
205/55R16	94W XL	6 1/2J	214	632	670	1477	340/50	400/A/A	BSW	YES	YES	YES
215/40ZR16	86W XL	7 1/2J	218	578	530	1168	340/50	400/A/A	BSW	YES	YES	YES
215/45R16	90V XL	7J	213	600	600	1323	340/50	400/A/A	BSW	YES	YES	YES
215/55ZR16	97W XL	7J	226	642	730	1609	340/50	400/A/A	BSW	YES	YES	YES
225/50ZR16	96W XL	7J	233	632	710	1565	340/50	400/A/A	BSW	YES	YES	YES
225/55R16	99W XL	7 J	233	654	775	1709	340/50	400/A/A	BSW	YES	YES	YES
165/35R17	68VXL	6 J	170	547	315	694	340/50	400/A/A	BSW	YES	YES	YES
165/40R17	72V	6 J	170	564	355	783	340/50	400/A/A	BSW	YES	YES	YES
165/45R17	76VXL	5 1/2J	165	579	400	882	340/50	400/A/A	BSW	YES	YES	YES
185/35R17	82V	6 1/2J	183	562	475	1047	340/50	400/A/A	BSW	YES	YES	YES
185/40R17	78VXL	6 1/2J	188	580	425	937	340/50	400/A/A	BSW	YES	YES	YES
195/45ZR17	85W XL	6 1/2J	195	608	515	1135	340/50	400/A/A	BSW	YES	YES	YES
205/40R17	84W XL	7 1/2J	212	596	500	1102	340/50	400/A/A	BSW	YES	YES	YES
205/45R17	88W XL	7 J	206	616	560	1235	340/50	400/A/A	BSW	YES	YES	YES
205/50R17	93W XL	6 1/2J	214	638	650	1433	340/50	400/A/A	BSW	YES	YES	YES
205/55ZR17	95W XL	6 1/2J	214	658	690	1521	340/50	400/A/A	BSW	YES	YES	YES
215/40ZR17	87W XL	7 1/2J	218	604	545	1201	340/50	400/A/A	BSW	YES	YES	YES
215/45R17	91W XL	7 J	213	626	615	1356	340/50	400/A/A	BSW	YES	YES	YES
215/50R17	95W XL	7 J	226	648	690	1521	340/50	400/A/A	BSW	YES	YES	YES
215/55R17	98W XL	7 J	226	668	750	1653	340/50	400/A/A	BSW	YES	YES	YES
225/45R17	94W XL	7 1/2J	225	634	670	1477	340/50	400/A/A	BSW	YES	YES	YES
225/50R17	98W XL	7 J	233	658	750	1653	340/50	400/A/A	BSW	YES	YES	YES
225/55R17	101W XL	7 J	233	680	825	1819	340/50	400/A/A	BSW	YES	YES	YES
235/45R17	97W XL	8 J	236	644	730	1609	340/50	400/A/A	BSW	YES	YES	YES
235/50R17	100V	7 1/2J	245	668	800	1764	340/50	400/A/A	BSW	YES	YES	YES
235/55ZR17	103W	7 1/2J	245	690	875	1929	340/50	400/A/A	BSW	YES	YES	YES
245/40ZR17	95W XL	8 1/2J	248	628	690	1521	340/50	400/A/A	BSW	YES	YES	YES
245/45ZR17	99W	8 J	243	652	775	1709	340/50	400/A/A	BSW	YES	YES	YES
185/35R18	83V	6 1/2J	183	587	487	1074	340/50	400/A/A	BSW	YES	YES	YES
215/35ZR18	84W XL	7 1/2J	218	607	500	1102	340/50	400/A/A	BSW	YES	YES	YES
215/40ZR18	89W XL	7 1/2J	218	629	580	1279	340/50	400/A/A	BSW	YES	YES	YES
215/45ZR18	93W XL	7J	213	651	650	1433	340/50	400/A/A	BSW	YES	YES	YES
215/55R18	99V	7 J	226	693	775	1709	340/50	400/A/A	BSW	YES	YES	YES
225/40R18	92W XL	8 J	230	637	630	1389	340/50	400/A/A	BSW	YES	YES	YES
225/45R18	95W XL	7 1/2J	225	659	690	1521	340/50	400/A/A	BSW	YES	YES	YES
225/55R18	102V	7 J	233	705	850	1874	340/50	400/A/A	BSW	YES	YES	YES
235/40R18	95W XL	8 1/2J	241	645	690	1521	340/50	400/A/A	BSW	YES	YES	YES
235/45ZR18	98W XL	8 J	236	669	750	1653	340/50	400/A/A	BSW	YES	YES	YES
235/50R18	97V	7 1/2J	245	693	730	1609	300/44	400/A/A	BSW	YES	YES	YES
235/55R18	104V	7 1/2J	245	715	900	1984	340/50	400/A/A	BSW	YES	YES	YES
245/40R18	97W XL	8 1/2J	248	653	730	1609	340/50	400/A/A	BSW	YES	YES	YES
245/45R18	100W XL	8 J	243	677	800	1764	340/50	400/A/A	BSW	YES	YES	YES
245/50ZR18	104W	7 1/2J	253	703	900	1984	340/50	400/A/A	BSW	YES	YES	YES
255/35ZR18	94W XL	9J	260	635	670	1477	340/50	400/A/A	BSW	YES	YES	YES
255/40ZR18	99W XL	9J	260	661	775	1709	340/50	400/A/A	BSW	YES	YES	YES
255/45ZR18	103W	8 1/2J	255	687	875	1929	340/50	400/A/A	BSW	YES	YES	YES
255/55R18	109V	8 J	265	737	1030	2271	340/50	400/A/A	BSW	YES	YES	YES
265/35ZR18	97W XL	9 1/2J	271	643	730	1609	340/50	400/A/A	BSW	YES	YES	YES
275/35ZR18	99W XL	9 1/2J	278	649	775	1709	340/50	400/A/A	BSW	YES	YES	YES
215/35ZR19	85W XL	7 1/2J	218	633	515	1135	340/50	400/A/A	BSW	YES	YES	YES
225/35ZR19	88W XL	8J	230	641	560	1235	340/50	400/A/A	BSW	YES	YES	YES
225/45ZR19	96W XL	7 1/2J	225	685	710	1565	340/50	400/A/A	BSW	YES	YES	YES
225/55R19	99V	7J	233	731	775	1709	300/44	400/A/A	BSW	YES	YES	YES
235/35ZR19	91W XL	8 1/2J	241	647	615	1356	340/50	400/A/A	BSW	YES	YES	YES
235/40ZR19	96W	8 1/2J	241	671	710	1565	340/50	400/A/A	BSW	YES	YES	YES
235/45ZR19	99W XL	8J	236	695	775	1709	340/50	400/A/A	BSW	YES	YES	YES
235/50ZR19	103W XL	7 1/2J	245	719	875	1929	340/50	400/A/A	BSW	YES	YES	YES
235/55R19	105V XL	7 1/2J	245	741	925	2039	340/50	400/A/A	BSW	YES	YES	YES
245/35ZR19	93W XL	8 1/2J	248	655	650	1433	340/50	400/A/A	BSW	YES	YES	YES
245/40ZR19	98W XL	8 1/2J	248	679	750	1653	340/50	400/A/A	BSW	YES	YES	YES
245/45R19	102W XL	8 J	243	703	850	1874	340/50	400/A/A	BSW	YES	YES	YES
245/55R19	107V XL	7 1/2J	253	753	975	2149	340/50	400/A/A	BSW	YES	YES	YES
255/30ZR19	91Y XL	9J	260	637	615	1356	340/50	400/A/A	BSW	YES	YES	YES
255/35ZR19	96W XL	9J	260	661	710	1565	340/50	400/A/A	BSW	YES	YES	YES
255/40ZR19	100W XL	9J	260	687	800	1764	340/50	400/A/A	BSW	YES	YES	YES
255/45ZR19	104W XL	8 1/2J	255	713	900	1984	340/50	400/A/A	BSW	YES	YES	YES
255/50R19	107V XL	8J	265	739	975	2149	340/50	400/A/A	BSW	YES	YES	YES
275/30ZR19	96WXL	9 1/2J	278	649	710	1565	340/50	400/A/A	BSW	YES	YES	YES
275/35ZR19	100Y XL	9 1/2J	278	675	800	1764	340/50	400/A/A	BSW	YES	YES	YES
275/40ZR19	105W XL	9 1/2J	278	703	925	2039	340/50	400/A/A	BSW	YES	YES	YES
285/45R19	111V XL	9 1/2J	285	739	1090	2403	340/50	400/A/A	BSW	YES	YES	YES
205/35R20	84V	7 1/2J	212	652	500	1102	340/50	400/A/A	BSW	YES	YES	YES
225/35ZR20	90W	8 J	230	666	600	1323	340/50	400/A/A	BSW	YES	YES	YES
245/35ZR20	95WXL	8 1/2J	248	680	690	1521	340/50	400/A/A	BSW	YES	YES	YES
245/40ZR20	99WXL	8 1/2J	248	704	775	1709	340/50	400/A/A	BSW	YES	YES	YES
255/35ZR20	97W XL	9J	260	686	730	1609	340/50	400/A/A	BSW	YES	YES	YES
275/30ZR20	97WXL	9 1/2J	278	674	730	1609	340/50	400/A/A	BSW	YES	YES	YES
275/35ZR20	102WXL	9 1/2J	278	700	850	1874	340/50	400/A/A	BSW	YES	YES	YES
265/45ZR21	108W XL	9J	266	771	1000	2205	340/50	400/A/A	BSW	YES	YES	YES
275/45ZR21	110W XL	9J	273	781	1060	2337	340/50	400/A/A	BSW	YES	YES	YES
295/35ZR21	107W XL	10 1/2J	301	739	975	2149	340/50	400/A/A	BSW	YES	YES	YES
295/40ZR21	111W XL	10 1/2J	301	769	1090	2403	340/50	400/A/A	BSW	YES	YES	YES

• New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.




"V-shaped" pattern design

30 multi-angle "V-shaped" pattern design ensure high-speed handling and stability in straight lines and cornering.




"Y-shaped" directional pattern design

"Y-shaped" directional pattern design provides excellent horizontal or vertical drainage performance.

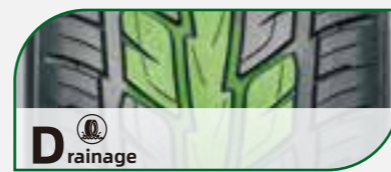


Shoulder design

Open shoulder design self-cleans the slush in the grooves.

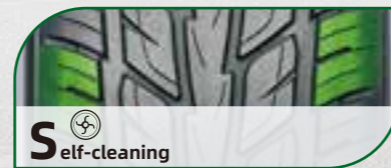

Tread pattern design

Central longitudinal ribs increase the contact area with road surface, and enhance braking performance in any road conditions.



Size	LI/SI	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall	Treadwear	Traction	Temp. Resist.
					(kg)	(Lbs)						
255/55R19	111V	8 J	265	763	1090	2403	340/50	400/A/A	BSW	YES	YES	YES
255/50R20	109VXL	8J	265	764	1030	2271	340/50	400/A/A	BSW	YES	YES	YES
255/55R20	110VXL	8J	265	788	1060	2337	340/50	400/A/A	BSW	YES	YES	YES
265/50R20	111V	8 1/2J	277	774	1090	2403	340/50	400/A/A	BSW	YES	YES	YES
275/40ZR20	106WXL	9 1/2J	278	728	950	2094	340/50	400/A/A	BSW	YES	YES	YES
275/45R20	110VXL	9 J	273	756	1060	2337	340/50	400/A/A	BSW	YES	YES	YES
275/55R20	117VXL	8 1/2J	284	810	1285	2833	340/50	400/A/A	BSW	YES	YES	YES
275/60R20	119HXL	8 J	279	838	1360	2998	340/50	400/A/A	BSW	YES	YES	YES
285/50R20	116V	9 J	297	794	1250	2756	340/50	400/A/A	BSW	YES	YES	YES
295/45ZR20	114W	10 J	296	774	1180	2601	340/50	400/A/A	BSW	YES	YES	YES
315/35ZR20	110WXL	11J	320	728	1060	2336.86067	340/50	400/A/A	BSW	YES	YES	YES
265/35ZR22	102WXL	9 1/2J	271	745	850	1874	340/50	400/A/A	BSW	YES	YES	YES
265/40R22	106VXL	9 1/2J	271	771	950	2094	340/50	400/A/A	BSW	YES	YES	YES
275/40ZR22	107WXL	9 1/2J	275	779	975	2149	340/50	400/A/A	BSW	YES	YES	YES
285/35ZR22	106W	10 J	290	759	950	2094	340/50	400/A/A	BSW	YES	YES	YES
285/40R22	110V	10 J	290	787	1060	2337	340/50	400/A/A	BSW	YES	YES	YES
285/45R22	114VXL	9 1/2J	285	815	1180	2601	340/50	400/A/A	BSW	YES	YES	YES
295/30ZR22	103W	10 1/2J	301	737	875	1929	340/50	400/A/A	BSW	YES	YES	YES
305/40R22	114VXL	11 J	313	803	1180	2601	340/50	400/A/A	BSW	YES	YES	YES
305/45R22	118VXL	10J	303	833	1320	2910.05291	340/50	400/A/A	BSW	YES	YES	YES
275/25ZR24	96W	10J	283	748	710	1565	340/50	400/A/A	BSW	YES	YES	YES
295/35ZR24	110W	10 1/2J	301	816	1060	2337	340/50	400/A/A	BSW	YES	YES	YES
305/35ZR24	112W	11J	313	824	1120	2469	340/50	400/A/A	BSW	YES	YES	YES

L-ZEAL 56 (RFT)

ST WINTER MT AT HT A/S VAN RFT UHP HP




High-strength bead structure

High-strength bead structure design prevents the tires from falling off the ring when driving at 0 air pressure, and improves the driving durability.



Apex Low-heat-generation formula design

Low-heat-generation formula design of apex can effectively reduce the heat generated when the tire is running under pressure and improve the durability.




Sidewall with high-strength cord reinforcement layer

Sidewall adopts a high-strength cord reinforcement layer to increase the sidewall strength, maintain good thermal stability under pressure shortage, and improve low-pressure durability.



Sidewall with dual composite sidewall support rubber

Sidewall adopts dual composite sidewall support rubber, which has high support strength and good buffering performance. Unique formula design can improve sidewall strength and reduce heat generation, increasing sidewall durability and providing safe driving.

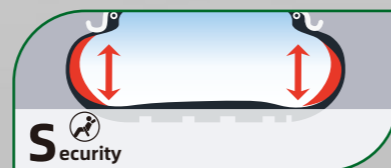

Size	LI/SI	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall	RFT	UHP	HP
					(kg)	(Lbs)						
205/45ZRF17	88WXL	7J	206	616	560	1235	340/50	300/A/A	BSW	YES	YES	YES
205/50ZRF17	93WXL	6 1/2J	214	638	650	1433	340/50	300/A/A	BSW	YES	YES	YES
225/45ZRF17	94WXL	7 1/2J	225	634	670	1477	340/50	300/A/A	BSW	YES	YES	YES
225/50ZRF17	98WXL	7J	233	658	750	1653	340/50	300/A/A	BSW	YES	YES	YES
225/55RF17	97V	7J	233	680	730	1609	300/44	300/A/A	BSW	YES	YES	YES
235/55RF17	99V	7 1/2J	245	690	775	1709	300/44	300/A/A	BSW	YES	YES	YES
215/55ZRF18	99WXL	7J	226	693	775	1709	340/50	300/A/A	BSW	YES	YES	YES
225/40ZRF18	92WXL	8 J	230	637	630	1389	340/50	300/A/A	BSW	YES	YES	YES
225/45ZRF18	95WXL	7 1/2J	225	659	690	1521	340/50	300/A/A	BSW	YES	YES	YES
235/50RF18	97V	7 1/2J	245	693	730	1609	300/44	300/A/A	BSW	YES	YES	YES
245/45ZRF18	100WXL	8 J	243	677	800	1764	340/50	300/A/A	BSW	YES	YES	YES
245/40ZRF19	98WXL	8 1/2J	248	679	750	1653	340/50	300/A/A	BSW	YES	YES	YES
245/45ZRF19	98W	8J	243	703	750	1653	300/44	300/A/A	BSW	YES	YES	YES
245/40ZRF20	99WXL	8 1/2J	248	704	775	1709	340/50	300/A/A	BSW	YES	YES	YES
275/35ZRF20	102WXL	9 1/2J	278	700	850	1874	340/50	300/A/A	BSW	YES	YES	YES



L-MAX9

Silence design

Silence design of steel sheets. 700 pieces sipes divide the "Z" type tread blocks into small pieces greatly reduce tire noise and improve driving comfort, enjoying quiet and comfortable effect that same series tires cannot bring.




Simulate Design

Simulate double "Y" tread pattern design improve grip performance without reducing tread blocks' rigidity, shorten braking distance, and improve driving safety.



Zigzag grooves

Zigzag pattern grooves design. Classic zigzag grooves provide excellent driving stability, and assure a smooth and comfortable ride.

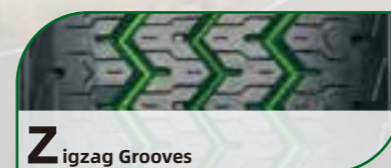

White sidewall design

White sidewall. The white sidewall with 20mm width design is beautiful and dignified, and it is suitable for car modification.



Size	LI/SI	PR	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall	🚗	🚚	🚛
						(kg)	(Lbs)					
185R14C	102/100R	8PR	5 1/2J	188	650	850/800	1875/1765	450/65	BSW	YES	YES	YES
185R14C	102/100R	8PR	5 1/2J	188	650	850/800	1875/1765	450/65	WSW	YES	YES	YES
195R14C	106/104R	8PR	5 1/2J	198	666	950/900	2094/1984	450/65	BSW	YES	YES	YES
195R14C	106/104R	8PR	5 1/2J	198	666	950/900	2094/1984	450/65	WSW	YES	YES	YES
205R14C	109/107R	8PR	6J	208	686	1030/975	2271/2150	450/65	BSW	YES	YES	YES
205/75R14C	109/107R	8PR	5 1/2J	203	664	1030/975	2271/2149	475/69	BSW/WSW	YES	YES	YES
215R14C	112/110R	8PR	6J	218	700	1120/1060	2469/2337	450/65	BSW	YES	YES	YES
215/75R14C	112/110R	8PR	6J	216	678	1120/1060	2469/2337	475/69	BSW	YES	YES	YES
185R15C	103/102R	8PR	5 1/2J	188	674	875/850	1929/1874	450/65	BSW	YES	YES	YES
195R15C	106/104R	8PR	5 1/2J	196	693	950/900	2094/1984	450/65	WSW	YES	YES	YES
195R15C	106/104R	8PR	5 1/2J	196	693	950/900	2094/1984	450/65	BSW	YES	YES	YES
165/70R14C	89/87R	6PR	5J	170	588	580/545	1279/1202	375/54	BSW	YES	YES	YES
175/65R14C	90/88R	6PR	5J	177	584	600/560	1323/1235	375/54	BSW	YES	YES	YES
195/70R15C	104/102R	8PR	6J	201	655	900/850	1984/1874	450/65	BSW	YES	YES	YES
205/70R15C	106/104R	8PR	6	209	669	950/900	2094/1984	450/65	BSW	YES	YES	YES
NEW 205/75R15C	109/107R	8PR	5 1/2J	203	689	1030/975	2271/2149	475/69	WSW	YES	YES	YES
215/65R15C	104/102R	6PR	6 1/2	221	661	900/850	1984/1874	375/54	BSW	YES	YES	YES
215/70R15C	104/101R	8PR	6 1/2J	221	683	900/825	1984/1819	450/65	BSW	YES	YES	YES
225/70R15C	112/110R	8PR	6 1/2	228	697	1120/1060	2469/2337	450/65	BSW	YES	YES	YES
175/55R16C	101/99R	8PR	5J	177	668	825/775	1819/1705	475/69	BSW	YES	YES	YES
195/60R16C	99/97T	6PR	6	201	640	775/730	1709/1609	375/54	BSW	YES	YES	YES
195/75R16C	107/105R	8PR	5 1/2J	196	698	975/925	2149/2039	475/69	BSW	YES	YES	YES
205/65R16C	107/105R	8PR	6J	209	672	975/925	2149/2039	475/69	BSW	YES	YES	YES
205/75R16C	110/108R	8PR	5 1/2	203	714	1060/1000	2337/2204	475/69	BSW	YES	YES	YES
215/60R16C	103/101T	6PR	6 1/2	221	664	875/825	1929/1819	375/54	BSW	YES	YES	YES
215/65R16C	109/107R	8PR	6 1/2J	221	686	1030/975	2271/2149	475/69	BSW	YES	YES	YES
215/70R16C	108/106R	6PR	6 1/2J	221	708	1000/950	2205/2094	375/54	BSW	YES	YES	YES
225/65R16C	112/110R	8PR	6 1/2J	228	698	1120/1060	2469/2337	475/69	BSW	YES	YES	YES
NEW 225/75R16C	116/114R	8PR	6J	223	744	1250/1180	2756/2601	475/69	BSW	YES	YES	YES
235/65R16C	115/113R	8PR	7J	240	712	1215/1150	2679/2535	475/69	BSW	YES	YES	YES
NEW 215/60R17C	109/107T	8PR	6 1/2J	221	690	1030/975	2271/2149	475/69	BSW	YES	YES	YES

ST WINTER MT AT HT A/S VAN RFT UHP HP




* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.

L-STRONG36


Multi-angle design

Multi-angle design tread blocks design with approximate 90 degree stereo angle greatly improve tire's grip performance, increase off-road performance, and enhance vehicle's passage capacity in any extreme conditions.

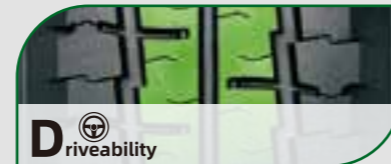


Triple vertical grooves

Triple vertical groove design. 3 main straight line grooves improve drainage, self-cleaning and safety performance.

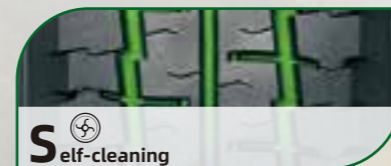

3D shoulder

3D Ups and downs shoulder design improves handling performance and ensure a safe driving.

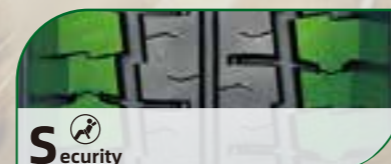

Stone ejection design

Stone removing central grooves design possess a good function of stone removing, enhance the puncture resistance and long mileages.



Size	LI/SI	PR	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall	Treadwear	Mud & Snow	Traction
						(kg)	(Lbs)					
185R14C	102/100R	8PR	5 1/2J	188	650	850/800	1875/1765	450/65	BSW	YES	YES	YES
195R14C	106/104R	8PR	5 1/2J	198	666	950/900	2094/1984	450/65	BSW	YES	YES	YES
205R14C	109/107R	8PR	6J	208	686	1030/975	2271/2149	450/65	BSW	YES	YES	YES
195R15C	106/104R	8PR	5 1/2J	196	693	950/900	2094/1984	450/65	BSW	YES	YES	YES
195/70R15C	104/102R	8PR	6J	201	655	900/850	1984/1875	450/65	BSW	YES	YES	YES
225/70R15C	112/110R	8PR	6 1/2J	228	697	1120/1060	2470/2335	450/65	BSW	YES	YES	YES
185/75R16C	104/102R	8PR	5J	184	684	900/850	1984/1875	475/69	BSW	YES	YES	YES
195/65R16C	104/102R	8PR	6J	201	660	900/850	1984/1875	475/69	BSW	YES	YES	YES
195/75R16C	107/105R	8PR	5 1/2J	196	698	975/925	2150/2040	475/69	BSW	YES	YES	YES
205/65R16C	107/105R	8PR	6J	209	672	975/925	2149/2039	475/69	BSW	YES	YES	YES
205/75R16C	110/108R	8PR	5 1/2J	203	714	1060/1000	2335/2205	475/69	BSW	YES	YES	YES
215/75R16C	116/114R	10PR	6J	216	728	1250/1180	2756/2601	525/76	BSW	YES	YES	YES




ST WINTER MT AT HT A/S VAN RFT UHP HP

L-POWER28


Zigzag grooves

Zigzag groove design. Zigzag and trailed main grooves enhance the strong traction; improve the drainage and anti-skip performance. Large slope tread grooves design provides excellent stone removing performance.

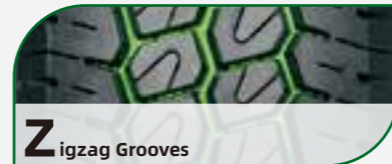


3D steel sheets

3D interlaced steel sheets design. 3D interlaced steel sheets increase the grip ability, braking force and safety of driving.

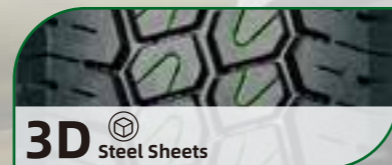


Closed shoulder

Coherent closed shoulder design. Enhanced rid and coherent closed block design on shoulder prevents the leaning-grind caused by heavy rigidity, and remain the high-speed turning agility at the same time.

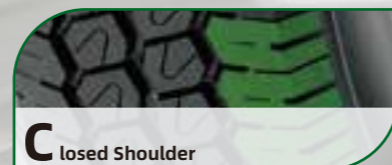

Irregular pattern

Irregular pattern and multi-pitch design brings silence and comfortable ride.

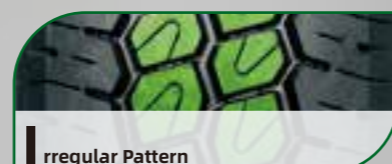

Size	LI/SI	PR	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall	🔊	🌧️	🔊
						(kg)	(Lbs)					
145R12C	86/84Q	8PR	4.00B	145	537	530/500	1168/1102	450/65	BSW	YES	YES	YES
155R12LT/C	83/81S	6PR	4.50B	157	553	487/462	1074/1019	350/51	BSW	YES	YES	YES
155R12LT/C	88/86S	8PR	4.50B	157	553	560/530	1235/1168	450/65	BSW	YES	YES	YES
155/70R12LT	104/102R	12PR	4.50B	157	523	900/850	1984/1874	650	BSW	YES	YES	YES
NEW 5.00R12LT	83/81Q	8PR	3.50B	143	568	487/462	1074/1019	450/65	BSW	YES	YES	YES
NEW 5.50R12LT	92/90Q	10PR	3.50B	160	595	630/600	1389/1323	560/81	BSW	YES	YES	YES
5.50R13LT	88/84Q	8PR	4.00B	160	620	560/500	1235/1102	460/67	BSW	YES	YES	YES
NEW 145R13C	88/86Q	8PR	4.00B	147	566	560/530	1235/1168	450/65	BSW	YES	YES	YES
155R13LT/C	90/88Q	8PR	4.50B	157	578	600/560	1323/1235	450/65	BSW	YES	YES	YES
165R13LT	94/93R	8PR	4.50B	165	594	670/650	1477/1433	450/65	BSW	YES	YES	YES
165/70R13LT	88/86R	6PR	5.00B	170	562	560/530	1235/1168	375	BSW	YES	YES	YES
175R13LT	97/95R	8PR	5.00B	177	610	730/690	1609/1521	450/65	BSW	YES	YES	YES
165R14LT	91/90R	6PR	4 1/2J	165	620	615/600	1356/1323	350/51	BSW	YES	YES	YES
175R14LT	99/97R	8PR	5J	178	634	775/730	1709/1609	450/65	BSW	YES	YES	YES
175/70R14LT	95/93S	6PR	5J	177	602	690/650	1521/1433	375/54	BSW	YES	YES	YES
175/75R14LT	94/91R	8PR	5J	177	618	670/615	1477/1356	450/65	BSW	YES	YES	YES
165/70R13	79T	--	5.00B	170	562	437	964	300/44	BSW	-	-	-
165/70R14	81T	--	5J	170	588	462	1019	300/44	BSW	-	-	-

HP
UHP
RFT
VAN
A/S
HT
AT
MT
WINTER
ST



MULTIWAYS 52

ST WINTER MT AT HT A/S VAN RFT UHP HP



Zigzag grooves

The Zigzag pattern main grooves design ensures excellent anti-hydro performance and improves wet grip.




Wear-resistant

Deep pattern grooves and high wear-resistant tread compound, ensures excellent wear resistance.



The thicker sidewall

The strengthened carcass and thicker sidewall make the tire stronger with better bearing capacity and puncture resistant.

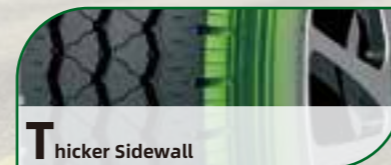

High-load

Using high-strength steel wire and cap layer in tire structure to make the tire stronger and enhance the reliability and durability.



Size	LI/SI	PR	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall			
						(kg)	(Lbs)					
7.00R16LT	115/110N	12PR	5.50F	200	775	1215/1060	2679/2337	670/97	BSW	YES	YES	YES
7.50R16LT	122/118N	14PR	6.00G	215	805	1500/1320	3307/2910	770/112	BSW	YES	YES	YES




Three stepped longitudinal main groove design

Excellent drainage performance and firm grip on wet and dry roads.




Unique design of the block and the high-density sipe

Ensure the good heat dissipation of the block with great grip and traction.

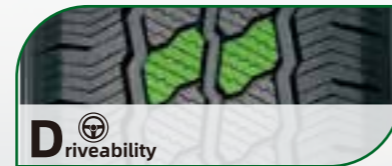

Wide shoulder block design

Improve the robustness of the block and the durability and load capacity of the tire; enhance the steering performance.

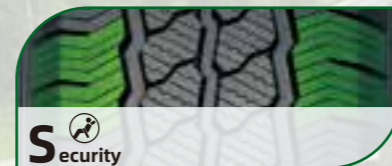

Low noise pattern design

Closed shoulder effectively prevent the noise spread; the tuned pattern extends to the rear of the shoulders to allow for even wear and further noise elimination.



Innovative four-season tread compound

Compound features high grip performance and high temperature resistance, and improve the grip under low temperature conditions.

Size	LI/SI	PR	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall	Tire Icon 1	Tire Icon 2	Tire Icon 3
						(kg)	(Lbs)					
175/65R14C	90/88T	6PR	5	177	584	600/560	1323/1235	375/54	BSW	YES	YES	YES
175/70R14C	95/93T	6PR	5	177	602	690/650	1521/1433	375/54	BSW	YES	YES	YES
195/70R15C	104/102R	8PR	6	201	655	900/850	1984/1874	450/65	BSW	YES	YES	YES
205/70R15C	106/104R	8PR	6	209	669	950/900	2094/1984	450/65	BSW	YES	YES	YES
215/70R15C	109/107R	8PR	6 1/2	221	683	1030/975	2271/2149	450/65	BSW	YES	YES	YES
225/70R15C	112/110R	8PR	6 1/2	228	697	1120/1060	2469/2337	450/65	BSW	YES	YES	YES
185/75R16C	104/102R	8PR	5	184	684	900/850	1984/1874	475/69	BSW	YES	YES	YES
195/60R16C	99/97H	6PR	6	201	640	775/730	1709/1609	375/54	BSW	YES	YES	YES
195/65R16C	104/102T	8PR	6	201	660	900/850	1984/1874	475/69	BSW	YES	YES	YES
195/75R16C	107/105R	8PR	5 1/2	196	698	975/925	2149/2039	475/69	BSW	YES	YES	YES
205/65R16C	107/105T	8PR	6	209	672	975/925	2149/2039	475/69	BSW	YES	YES	YES
205/75R16C	113/111R	10PR	5.5	203	714	1150/1090	2535/2403	525/76	BSW	YES	YES	YES
215/60R16C	103/101T	6PR	6 1/2	221	664	875/825	1929/1819	375/54	BSW	YES	YES	YES
215/65R16C	109/107T	8PR	6 1/2	221	686	1030/975	2271/2149	475/69	BSW	YES	YES	YES
215/75R16C	113/111R	8PR	6	216	728	1150/1090	2535/2403	475/69	BSW	YES	YES	YES
225/65R16C	112/110R	8PR	6 1/2	228	698	1120/1060	2469/2337	475/69	BSW	YES	YES	YES
225/75R16C	121/120R	10PR	6	223	744	1450/1400	3197/3086	575/83	BSW	YES	YES	YES
235/65R16C	115/113R	8PR	7	240	712	1215/1150	2679/2535	475/69	BSW	YES	YES	YES
215/60R17C	109/107T	8PR	6 1/2	221	690	1030/975	2271/2149	475/69	BSW	YES	YES	YES

* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.



All season tread design

All season tread design superior comprehensive performance.



All Season Tread Design

Silence design


5 pitches design with best pattern permutation effectively reduce noise and show extremely silence.



Silence Design

Coordinated tread pattern


Ribs pattern in central tread and coordinated tread blocks on both sides ensure excellent steering and handling performance.

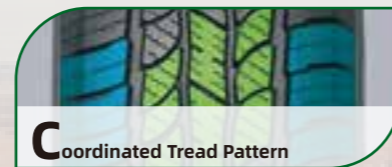

Coordinated Tread Pattern

High density grooves

High density grooves design. Pattern with a mass of grooves increase the contact area with road surface, enhance the drainage and wetland grip ability. Shorten the wetland braking distance.

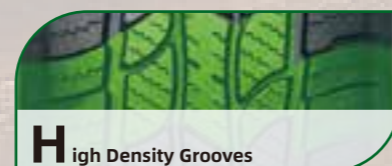

High Density Grooves

Size	LI/SI	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
					(kg)	(Lbs)						
215/75R15	100H	6 J	216	703	800	1763	300/44	460/A/A	BSW	YES	YES	YES
225/75R15	102H	6 J	223	719	850	1873	300/44	460/A/A	BSW	YES	YES	YES
235/75R15	105H	6 1/2J	235	733	925	2039	300/44	460/A/A	BSW	YES	YES	YES
265/70R15	112T	8 J	272	753	1120	2469	300/44	460/A/A	BSW	YES	YES	YES
215/65R16	102H	6 1/2J	221	686	850	1873	340/50	460/A/A	BSW	YES	YES	YES
215/70R16	100H	6 1/2J	221	708	800	1763	300/44	460/A/A	BSW	YES	YES	YES
225/70R16	103H	6 1/2J	228	722	875	1929	300/44	460/A/A	BSW	YES	YES	YES
225/75R16	104T	6 J	223	744	900	1984	300/44	460/A/A	BSW	YES	YES	YES
235/60R16	100H	7 J	240	688	800	1763	300/44	460/A/A	BSW	YES	YES	YES
235/70R16	106H	7 J	240	736	950	2094	300/44	460/A/A	BSW	YES	YES	YES
245/70R16	111H	7 J	248	750	1090	2403	340/50	460/A/A	BSW	YES	YES	YES
255/70R16	111H	7 1/2J	260	764	1090	2403	300/44	460/A/A	BSW	YES	YES	YES
265/70R16	112T	8 J	272	778	1120	2469	300/44	460/A/A	BSW	YES	YES	YES
265/75R16	116T	7 1/2J	267	804	1250	2755	300/44	460/A/A	BSW	YES	YES	YES
215/60R17	100H	6 1/2J	221	690	800	1763	340/50	460/A/A	BSW	YES	YES	YES
215/65R17	99V	6 1/2J	221	712	775	1708	300/44	460/A/A	BSW	YES	YES	YES
235/60R17	102H	7 J	240	714	850	1873	300/44	460/A/A	BSW	YES	YES	YES
235/65R17	108H	7 J	240	738	1000	2204	340/50	460/A/A	BSW	YES	YES	YES
235/70R17	107H	7 J	240	762	975	2149	300/44	460/A/A	BSW	YES	YES	YES
245/65R17	111H	7 J	248	750	1090	2403	340/50	460/A/A	BSW	YES	YES	YES
265/65R17	112H	8 J	272	776	1120	2469	300/44	460/A/A	BSW	YES	YES	YES
265/70R17	115H	8 J	272	804	1215	2678	300/44	460/A/A	BSW	YES	YES	YES
235/60R18	107H	7 J	240	739	975	2149	340/50	460/A/A	BSW	YES	YES	YES
245/60R18	105H	7 J	248	751	925	2039	300/44	460/A/A	BSW	YES	YES	YES
255/60R18	112H	7 1/2J	260	763	1120	2469	340/50	460/A/A	BSW	YES	YES	YES
265/60R18	114H	8 J	272	775	1180	2601	340/50	460/A/A	BSW	YES	YES	YES
275/65R18	116H	8 J	279	815	1250	2755	300/44	460/A/A	BSW	YES	YES	YES
255/55R19	111V	8 J	265	763	1090	2403	340/50	460/A/A	BSW	YES	YES	YES




L-FINDER78

ST WINTER MT AT HT A/S VAN RFT UHP HP




Optimized main grooves

Four main grooves design. Four optimized main vertical grooves enhance the drainage performance, shorten the braking distance. Increase the handling ability on dry and wet road.

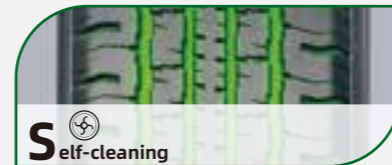


Wide and large shoulder

Wide shoulder groove design. Wide and large shoulder grooves increase the grip ability and trafficability, ensure the low heat generation and riding safety.

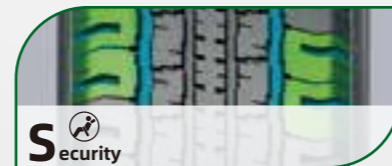

Changeable grooves

Optimized groove design. Unique pattern design with changeable width provide strong grip on muddy roads and ensure the trafficability under bad road condition.

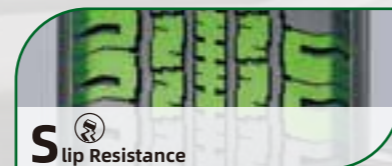

Silence design

Optimized block distance design. Accurate distance design of block and angle, reduce the driving noise, provide silent and comfortable high-speed ride.



Size	LI/SI	PR	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall	Treadwear	Traction	Temp. Resist.
						(kg)	(Lbs)						
P215/75R15	100T	-	6J	216	703	800	1764	300/44	420/A/A	BSW	YES	YES	YES
P235/75R15	105T	-	6 1/2J	235	733	925	2039	300/44	420/A/A	BSW	YES	YES	YES
P215/70R16	99T	-	6 1/2J	221	708	775	1709	300/44	420/A/A	BSW	YES	YES	YES
P225/70R16	101T	-	6 1/2J	228	722	825	1819	300/44	420/A/A	BSW	YES	YES	YES
P225/75R16	104T	-	6	223	744	900	1984	300/44	420/A/A	BSW	YES	YES	YES
P235/70R16	107T	-	7	240	736	975	2149	340/50	420/A/A	BSW	YES	YES	YES
P235/70R16	104T	-	7J	240	736	900	1984	300/44	420/A/A	BSW	YES	YES	YES
P235/75R16	109T	-	6 1/2J	235	758	1030	2271	340/50	420/A/A	BSW	YES	YES	YES
P245/70R16	106T	-	7	248	750	950	2094	300/44	420/A/A	BSW	YES	YES	YES
P255/65R16	106T	-	7 1/2J	260	738	950	2094	300/44	420/A/A	BSW	YES	YES	YES
P255/70R16	109T	-	7 1/2J	260	764	1030	2271	300/44	420/A/A	BSW	YES	YES	YES
P265/70R16	111T	-	8J	272	778	1090	2403	300/44	420/A/A	BSW	YES	YES	YES
P225/65R17	102T	-	6 1/2J	228	724	850	1874	300/44	420/A/A	BSW	YES	YES	YES
P235/60R17	100T	-	7	240	714	800	1764	300/44	420/A/A	BSW	YES	YES	YES
P235/65R17	103T	-	7	240	738	875	1929	300/44	420/A/A	BSW	YES	YES	YES
P245/65R17	105T	-	7	248	750	925	2039	300/44	420/A/A	BSW	YES	YES	YES
P265/65R17	110T	-	8J	272	776	1060	2337	300/44	420/A/A	BSW	YES	YES	YES
P265/70R17	113T	-	8J	272	804	1150	2535	300/44	420/A/A	BSW	YES	YES	YES
P235/60R18	102T	-	7	240	739	850	1874	300/44	420/A/A	BSW	YES	YES	YES
P235/65R18	104T	-	7	240	763	900	1984	300/44	420/A/A	BSW	YES	YES	YES
31*10.50R15LT	109Q	6PR	8 1/2J	268	775	1030	2270	350/50	-	BSW	YES	YES	YES
LT215/85R16	115/112Q	10PR	6 J	216	772	1215/1120	2680/2470	550/80	-	BSW	YES	YES	YES
LT225/75R16	115/112Q	10PR	6 J	223	744	1215/1120	2680/2470	550/80	-	BSW	YES	YES	YES
LT235/85R16	120/116Q	10PR	6 1/2J	235	806	1380/1260	3042/2778	550/80	-	BSW	YES	YES	YES
LT245/75R16	120/116Q	10PR	7 J	248	774	1380/1260	3042/2778	550/80	-	BSW	YES	YES	YES
LT265/75R16	123/120Q	10PR	7 1/2J	267	804	1550/1400	3415/3085	550/80	-	BSW	-	-	-
LT235/80R17	120/117Q	10PR	6 1/2J	235	808	1400/1285	3085/2835	550/80	-	BSW	YES	YES	YES
LT245/70R17	119/116Q	10PR	7 J	248	776	1360/1250	3000/2755	550/80	-	BSW	YES	YES	YES
LT245/75R17	121/118Q	10PR	7 J	248	800	1450/1320	3195/2910	550/80	-	BSW	YES	YES	YES
LT265/70R17	121/118Q	10PR	8 J	272	804	1450/1320	3195/2910	550/80	-	BSW	YES	YES	YES




* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.



Four wide vertical drainage grooves

Offer necessary high-speed performance of SUV and cross country vehicle, provide great wetland drainage, and improve steering and handling ability on wet road.

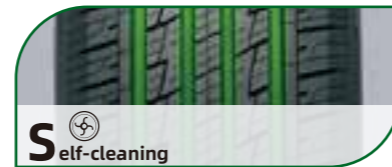

Directional rib in the center of crown with particularly

Designed lateral grooves and multiple sipes for balanced block rigidity, provide excellent drainage performance, ensure good handling performance in rain or snow.



Continuously closed design on the tire shoulder and supported by longitudinal vertical grooves

Reduce the rigidity of tire shoulder and restrain the eccentric wear effectively, block noise spread of central pattern, reduce the noise and bring extraordinary driving comfortability.



Restrain the eccentric wear rib design on tire shoulder

Stabilize tire shoulder contour, reduce eccentric wear of tire shoulder, and improve the handling stability when turning at high speed.



Size	LI/SI	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall	Treadwear	Traction	Temp. Resist.
					(kg)	(Lbs)						
215/65R16	98H	6 1/2J	221	686	750	1653	300/44	420/A/A	BSW	YES	YES	YES
215/70R16	100H	6 1/2J	221	708	800	1764	300/44	420/A/A	BSW	YES	YES	YES
225/70R16	107HXL	6 1/2J	228	722	975	2149	340/50	420/A/A	BSW	YES	YES	YES
235/60R16	100H	7J	240	688	800	1764	300/44	420/A/A	BSW	YES	YES	YES
235/70R16	106H	7J	240	736	950	2094	300/44	420/A/A	BSW	YES	YES	YES
245/70R16	107H	7J	248	750	975	2149	300/44	420/A/A	BSW	YES	YES	YES
245/70R16	111HXL	7J	248	750	1090	2403	340/50	420/A/A	BSW	YES	YES	YES
255/65R16	109H	7 1/2J	260	738	1030	2271	300/44	420/A/A	BSW	YES	YES	YES
255/70R16	111T	7 1/2J	260	764	1090	2403	300/44	420/A/A	BSW	YES	YES	YES
265/70R16	112T	8J	272	778	1120	2469	300/44	420/A/A	BSW	YES	YES	YES
275/70R16	114T	8J	279	792	1180	2601	300/44	420/A/A	BSW	YES	YES	YES
215/60R17	96H	6 1/2J	221	690	710	1565	300/44	420/A/A	BSW	YES	YES	YES
215/65R17	99V	6 1/2J	221	712	775	1709	300/44	420/A/A	BSW	YES	YES	YES
225/60R17	99H	6 1/2J	228	702	775	1709	300/44	420/A/A	BSW	YES	YES	YES
235/60R17	102H	7J	240	714	850	1874	300/44	420/A/A	BSW	YES	YES	YES
235/60R17	106HXL	7J	240	714	950	2094	340/50	420/A/A	BSW	YES	YES	YES
225/65R17	102H	6 1/2J	228	724	850	1874	300/44	420/A/A	BSW	YES	YES	YES
235/65R17	104H	7J	240	738	900	1984	300/44	420/A/A	BSW	YES	YES	YES
245/65R17	111HXL	7J	248	750	1090	2403	340/50	420/A/A	BSW	YES	YES	YES
245/70R17	114TXL	7J	248	776	1180	2601	340/50	420/A/A	BSW	YES	YES	YES
255/60R17	110HXL	7 1/2J	260	738	1060	2337	340/50	420/A/A	BSW	YES	YES	YES
255/65R17	110H	7 1/2J	260	764	1060	2337	300/44	420/A/A	BSW	YES	YES	YES
265/65R17	112H	8J	272	776	1120	2469	300/44	420/A/A	BSW	YES	YES	YES
265/70R17	115T	8J	272	804	1215	2679	300/44	420/A/A	BSW	YES	YES	YES
275/65R17	115T	8J	279	790	1215	2679	300/44	420/A/A	BSW	YES	YES	YES
285/65R17	116T	8 1/2J	292	802	1250	2756	300/44	420/A/A	BSW	YES	YES	YES
225/55R18	98H	7J	233	705	750	1653	300/44	420/A/A	BSW	YES	YES	YES
235/55R18	104HXL	7 1/2J	245	715	900	1984	340/50	420/A/A	BSW	YES	YES	YES
225/60R18	104HXL	6 1/2J	228	727	900	1984	340/50	420/A/A	BSW	YES	YES	YES
235/60R18	107HXL	7J	240	739	975	2149	340/50	420/A/A	BSW	YES	YES	YES
235/65R18	110HXL	7J	240	763	1060	2337	340/50	420/A/A	BSW	YES	YES	YES
245/60R18	105H	7J	248	751	925	2039	300/44	420/A/A	BSW	YES	YES	YES
255/60R18	112HXL	7 1/2J	260	763	1120	2469	340/50	420/A/A	BSW	YES	YES	YES
255/70R18	113T	7 1/2J	260	815	1150	2535	300/44	420/A/A	BSW	YES	YES	YES
265/60R18	110H	8J	272	775	1060	2337	300/44	420/A/A	BSW	YES	YES	YES
265/70R18	116T	8J	272	829	1250	2756	300/44	420/A/A	BSW	YES	YES	YES
275/60R18	117HXL	8J	279	787	1285	2833	340/50	420/A/A	BSW	YES	YES	YES
285/60R18	116H	8 1/2J	292	799	1250	2756	300/44	420/A/A	BSW	YES	YES	YES
235/65R19	109HXL	7	240	789	1030	2271	340/50	420/A/A	BSW	YES	YES	YES
245/55R19	107VXL	7 1/2J	253	753	975	2149	340/50	420/A/A	BSW	YES	YES	YES
255/50R19	107VXL	8J	265	739	975	2149	340/50	420/A/A	BSW	YES	YES	YES
255/55R19	111VXL	8J	265	763	1090	2403	340/50	420/A/A	BSW	YES	YES	YES
285/50R20	116VXL	9J	297	794	1250	2756	340/50	420/A/A	BSW	YES	YES	YES


MAGA A/T ONE

ST WINTER MT AT HT A/S VAN RFT UHP HP



All-terrain design

All-terrain four season tire pattern, more strengthful tread block design.

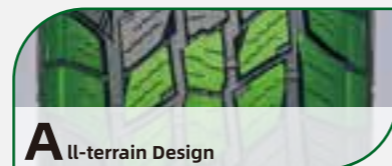


Stone ejection design

Open tread pattern design effectively prevents stone retention, strengthen stone ejection performance.




Zigzag steel sheets

Small zigzag "3D steel sheet" design effectively deliver grips on wet road conditions, enhance driving traction.

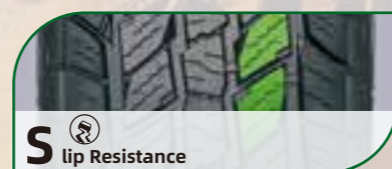

Abrasion resistance formula

Special tread glue formula delivers a longer life.

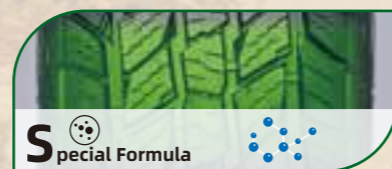

Size	LI/SI	PR	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall	Treadwear	Traction	Temp. Resist.
						(kg)	(Lbs)						
235/75R15	109S XL	-	6 1/2J	235	733	1030	2271	340/50	460/A/A	BSW	YES	YES	YES
235/70R16	106T	-	7 J	240	736	950	2094	300/44	460/A/A	BSW	YES	YES	YES
245/70R16	107T	-	7 J	248	750	975	2149	300/44	460/A/A	BSW	YES	YES	YES
265/70R16	112T	-	8 J	272	778	1120	2469	300/44	460/A/A	BSW	YES	YES	YES
235/65R17	104T	-	7 J	240	738	900	1984	300/44	460/A/A	BSW	YES	YES	YES
245/65R17	107S	-	7 J	248	750	975	2149	300/44	460/A/A	BSW	YES	YES	YES
265/70R17	115S	-	8 J	272	804	1215	2679	300/44	460/A/A	BSW	YES	YES	YES
31X10.50R15LT	109S	6PR	8 1/2J	268	775	1030	2270	350/50	-	BSW	YES	YES	YES
LT225/75R16	115/112Q	10PR	6 J	223	744	1215/1120	2470/2680	550/80	-	BSW	YES	YES	YES
LT235/85R16	120/116Q	10PR	6 1/2J	235	806	1380/1260	3042/2778	550/80	-	BSW	YES	YES	YES
LT245/75R16	120/116Q	10PR	7 J	248	774	1380/1260	3042/2778	550/80	-	BSW	YES	YES	YES
LT265/70R17	121/118R	10PR	8 J	272	804	1450/1320	3195/2910	550/80	-	BSW	YES	YES	YES




* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.

MAGA A/T TWO

All-terrain design

All-terrain four season tire pattern, more strengthful tread block design.

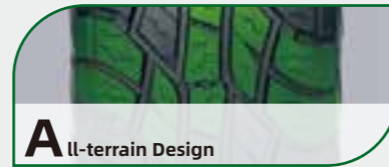

All-terrain Design

Stone ejection design

Open tread pattern design effectively prevents stone retention, strengthen stone ejection performance.



Stone Ejection Design

Zigzag steel sheets


Small zigzag "3D steel sheet" design effectively deliver grips on wet road conditions, enhance driving traction.



Slip Resistance

Abrasion resistance formula

Special tread glue formula delivers a longer life.

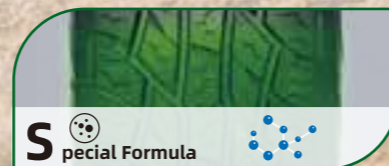

Special Formula

Size	LI/SI	PR	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall	Treadwear	Traction	Temp. Resist.
						(kg)	(Lbs)						
P205/70R15	96H	-	6J	209	669	710	1565	300/44	400/A/A	BSW/WSW	-	-	-
215/65R16	98T	-	6 1/2J	221	686	750	1653	300/44	400/A/A	BSW	YES	YES	YES
225/70R16	103T	-	6 1/2J	228	722	875	1929	300/44	400/A/A	BSW	YES	YES	YES
245/75R16	111T	-	7J	248	774	1090	2403	300/44	400/A/A	WSW	YES	YES	YES
255/70R16	111T	-	7 1/2J	260	764	1090	2403	300/44	400/A/A	WSW	YES	YES	YES
265/70R16	112T	-	8 J	272	778	1120	2469	300/44	460/A/A	BSW	YES	YES	YES
215/65R17	99T	-	6 1/2J	221	712	775	1708	300/44	400/A/A	BSW	YES	YES	YES
225/60R17	99H	-	6 1/2J	228	702	775	1708	300/44	400/A/A	BSW	YES	YES	YES
265/65R17	112T	-	8 J	272	776	1120	2469	300/44	460/A/A	BSW/WSW	YES	YES	YES
265/70R17	115S	-	8 J	272	804	1215	2679	300/44	460/A/A	BSW	YES	YES	YES
275/65R17	115T	-	8J	279	790	1215	2679	300/44	400/A/A	WSW	YES	YES	YES
285/65R17	116T	-	8 1/2J	292	802	1250	2755	300/44	400/A/A	WSW	YES	YES	YES
255/60R18	112T	-	7 1/2J	260	763	1120	2469	340/50	400/A/A	BSW	YES	YES	YES
265/60R18	110T	-	8 J	272	775	1060	2336	300/44	400/A/A	BSW/WSW	YES	YES	YES
275/65R18	116T	-	8 J	279	815	1250	2755	300/44	400/A/A	BSW	YES	YES	YES
285/60R18	120S XL	-	8 1/2J	292	799	1400	3086	340/50	460/A/A	BSW	YES	YES	YES
305/60R18	120S	-	9 J	311	823	1400	3086	300/44	460/A/A	BSW	-	-	-
265/50R20	111S XL	-	8 1/2J	277	774	1090	2403	340/50	400/A/A	BSW/WSW	YES	YES	YES
275/55R20	117S XL	-	8 1/2J	284	810	1285	2833	340/50	400/A/A	BSW	YES	YES	YES
285/55R20	119S XL	-	9 J	297	822	1360	2998	340/50	400/A/A	BSW	-	-	-
305/50R20	120S XL	-	9 1/2J	316	814	1400	3086	340/50	400/A/A	BSW	-	-	-
215R15C	112/110S	8PR	6J	218	725	1120/1060	2469/2337	450/65	-	BSW	YES	YES	YES
LT215/75R15	100/97Q	6PR	6J	216	703	800/730	1765/1610	350/50	-	WSW	YES	YES	YES
LT235/75R15	104/101S	6PR	6 1/2J	235	733	900/825	1985/1820	350/50	-	WSW	YES	YES	YES
245/75R15C	109/107S	6PR	7J	248	749	1030/975	2271/2149	375/54	-	BSW	YES	YES	YES
255/70R15C	112/110S	6PR	7 1/2J	260	739	1120/1060	2469/2337	375/54	-	BSW	YES	YES	YES
185/75R16C	104/102R	8PR	5J	184	684	900/850	1984/1874	475/69	-	BSW	YES	YES	YES
205R16C	110/108S	8PR	6J	208	736	1060/1000	2337/2205	450/65	-	WSW	YES	YES	YES
LT215/85R16	115/112Q	10PR	6J	216	772	1215/1120	2679/2469	575/84	-	WSW	YES	YES	YES
LT245/70R16	113/110S	8PR	7J	248	750	1150/1060	2535/2335	450/65	-	WSW	YES	YES	YES
LT265/70R16	121/118S	10PR	8J	272	778	1450/1320	3195/2910	550/80	-	WSW	YES	YES	YES
LT265/75R16	123/120Q	10PR	7 1/2J	267	804	1550/1400	3415/3085	550/80	-	BSW	-	-	-
LT285/75R16	126/123Q	10PR	8 J	286	834	1700/1550	3750/3415	550/80	-	BSW	-	-	-
LT245/65R17	111/108R	8PR	7J	248	750	1090/1000	2403/2205	450/65	-	WSW	YES	YES	YES
LT245/70R17	119/116S	10PR	7J	248	776	1360/1250	3000/2755	550/80	-	WSW	YES	YES	YES
LT245/75R17	121/118S	10PR	7J	248	800	1450/1320	3195/2910	550/80	-	WSW	YES	YES	YES
LT285/70R17	121/118Q	10PR	8 1/2J	292	832	1450/1320	3195/2910	550/80	-	BSW/WSW	YES	YES	YES
LT285/60R18	122/119Q	10PR	8 1/2J	292	799	1500/1360	3305/3000	550/80	-	BSW	-	-	-
LT285/65R18	125/122R	10PR	8 1/2J	292	827	1650/1500	3640/3305	550/80	-	WSW	-	-	-
LT325/60R18	124/121Q	10PR	9 1/2J	331	847	1600/1450	3525/3195	450/65	-	BSW	-	-	-
LT325/65R18	127/124Q	10PR	9 1/2J	331	879	1750/1600	3860/3525	450/65	-	BSW	-	-	-
31X10.50R15LT	109S	6PR	8 1/2J	268	775	1030	2270	350/50	-	WSW	YES	YES	YES

* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.

L-OFFROAD76

ST WINTER MT AT HT A/S VAN RFT UHP HP




Widened tread pattern design

Improve grounding performance, driving flexibility and braking performance to ensure safety.




Middle groove with lateral stepped stone ejection design

The horizontal stepped groove effectively decomposes the pumping noise source to reduce noise while improving the rigidity between the blocks; great stone ejection and mud shedding performance.

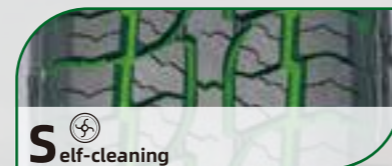

S-shaped shoulder block sipe design

Strengthen the adhesion with the road surface and improve the irregular wear; improve the robustness of the block for better durability and load capacity, as well as handling performance of the tire.

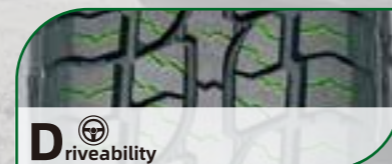

Sidewall Outlined White Letter and enhanced anti-scratch system design

Aggressive OWL and the enhanced anti-scratch sidewall to resist external damage and improve tire performance.

Size	LI/SI	PR	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall			
						(kg)	(Lbs)					
215/75R15LT	100/97S	6PR	6J	216	703	800/730	1764/1609	350/50	WSW	-	-	-
225/75R15LT	102/99S	6PR	6J	223	719	850/775	1874/1709	350/50	WSW	-	-	-
235/75R15LT	110/107S	8PR	6 1/2J	235	733	1060/975	2335/2150	450/65	WSW	-	-	-



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.

PREDATOR M/T

ST WINTER MT AT HT A/S VAN RFT UHP HP



Tread bionic "shark", block design

Better embedded with off-road complex terrain to enhance the grip of tires.



Bionic Pattern Design

Widen and deepen the groove design


Good heat dissipation, good self-cleaning performance and strong grip, suitable for all kinds of complex road conditions.



Driveability

The shoulder pattern adopts the silt self-cleaning technology and the stone ejection groove


The sludge accumulated in the groove automatically removed in rotation and the stone ejected to ensure safe and smooth driving.

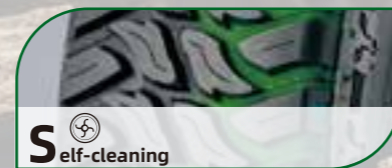

Self-cleaning

Sidewall bionic decorative design

The thickened sidewall matched with the bionic pattern to improve impact and damage resistance while meeting the individual needs of consumers.

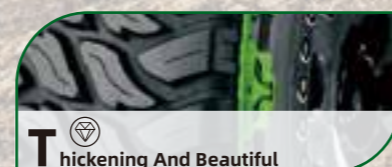

Thickening And Beautiful

Size	LI/SI	PR	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall	
						(kg)	(Lbs)			
LT235/75R15	104/101Q	6PR	6 1/2J	235	733	900/825	1985/1820	350/50	WSW	POR
LT235/70R16	110/107Q	8PR	7J	240	736	1060/975	2335/2150	450/65	WSW	POR
LT235/85R16	120/116Q	10PR	6 1/2J	235	806	1380/1260	3042/2778	550/80	WSW	POR
LT245/70R16	118/115Q	10PR	7J	248	750	1320/1215	2910/2680	550/80	WSW	POR
LT265/75R16	119/116Q	8PR	7 1/2J	267	804	1360/1250	3000/2755	450/65	WSW	POR
LT265/75R16	123/120Q	10PR	7 1/2J	267	804	1500/1400	3415/3085	550/80	WSW	-
LT285/75R16	116/113Q	6PR	8J	286	834	1250/1150	2755/2535	350/50	WSW	POR
LT285/75R16	126/123Q	10PR	8J	286	834	1700/1550	3750/3415	550/80	WSW	-
LT265/65R17	120/117Q	10PR	8J	272	782	1400/1285	3085/2835	550/80	WSW	POR
LT265/70R17	121/118Q	10PR	8J	272	804	1450/1320	3195/2910	550/80	WSW	POR
LT285/70R17	121/118Q	8PR	8 1/2J	292	832	1450/1320	3195/2910	450/65	WSW	POR
31X10.50R15LT	109Q	6PR	8 1/2J	268	775	1030	2270	350/50	WSW	POR
35X12.50R15LT	113Q	6PR	10J	318	877	1150	2535	250/35	WSW	POR
35X12.50R17LT	121Q	10PR	10J	318	877	1450	3195	450/65	WSW	POR
33X12.50R18LT	118Q	10PR	10J	318	826	1320	2910	450/65	WSW	POR
35X12.50R18LT	118Q	8PR	10J	318	877	1320	2910	350/50	WSW	POR
33X12.50R20LT	114Q	10PR	10J	318	826	1180	2600	450/65	WSW	POR
35X12.50R20LT	121Q	10PR	10J	318	877	1450	3195	450/65	WSW	POR
33X12.50R22LT	109Q	10PR	10J	318	832	1030	2270	450/65	BSW	POR



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.




Pyramid-shaped pattern

Pyramid-shaped pattern design improves grip and traction on muddy and sand-stone roads.



Self-cleaning grooves

Slush self-cleaning and rejection groove design guarantee a safe and smooth driving.

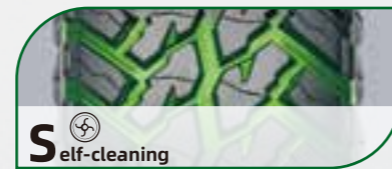

Rigidity shoulder

The shoulder extends to sidewall tread block design greatly protect the tire from external puncture or injury.



Anti-skip design

A mass of steel sheets and grooves design provide great grip ability and driving performance on wetland.



Size	LI/SI	PR	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall	
						(kg)	(Lbs)			
31x10.50R15LT	109Q	6PR	8 1/2J	268	775	1030	2270	350/50	BSW	POR
32X11.50R15LT	113Q	6PR	9 J	290	801	1150	2535	350/50	BSW	POR
33X12.50R15LT	108Q	6PR	10J	318	826	1000	2205	250/35	BSW	POR
33X12.50R17LT	120Q	10PR	10 J	318	826	1400	3085	450/65	BSW	POR
LT215/75R15	100/97Q	6PR	6 J	216	703	800/730	1765/1610	350/50	BSW	POR
LT235/75R15	104/101Q	6PR	6 1/2J	235	733	900/825	1985/1820	350/50	BSW	POR
LT215/85R16	115/112Q	10PR	6 J	216	772	1215/1120	2680/2470	550/80	BSW	POR
LT225/75R16	115/112N	10PR	6 J	223	744	1215/1120	2680/2470	550/80	BSW	POR
LT235/85R16	120/116Q	10PR	6 1/2J	235	806	1380/1260	3042/2778	550/80	BSW	POR
LT245/75R16	120/116N	10PR	7 J	248	774	1380/1260	3042/2778	550/80	BSW	POR
LT305/70R16	124/121P	10PR	9 J	311	834	1600/1450	3525/3195	450/65	BSW	-
LT315/75R16	127/124Q	10PR	8 1/2J	313	878	1750/1600	3860/3525	450/65	BSW	-




* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.




Optimal of tread pattern of directional tire

The single-guide and wide block design of shoulder chamfer can maximize the traction and the anti-skid performance and traction on the corners while improving the grip.

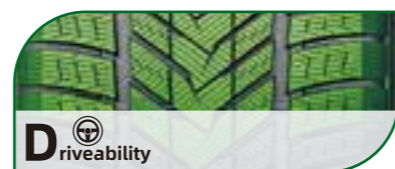

Special vertical and horizontal groove staggered design

The special staggered design of longitudinal and lateral grooves can effectively disperse the noise frequency and shorten the braking distance by 50% on icy and snowy roads.

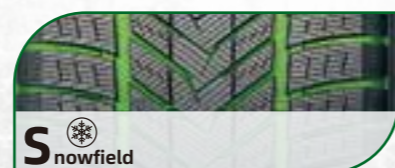

Combination design of S-shaped and I-shaped groove

The combined design of S-shaped fine grooves and I-shaped straight grooves further strengthens the tire contact area and ensures the grip and guidance of snowy and slippery roads.



New silicone formula design

The new silicone formula design keeps the rubber soft at -30°C to -40°C, can better fit the road surface, and increase the tire contact area and the friction coefficient between the tread and the ice surface.



Size	LI/SI	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall	Treadwear	Traction	Noise
					(kg)	(Lbs)					
255/55R18	109HXL	8J	265	737	1030	2271	340/50	BSW	YES	YES	YES
265/35R18	97VXL	9 1/2J	271	643	730	1609	340/50	BSW	YES	YES	YES
245/55R19	107HXL	7 1/2J	253	753	975	2149	340/50	BSW	YES	YES	YES
255/50R19	107HXL	8J	265	739	975	2149	340/50	BSW	YES	YES	YES
255/55R19	111HXL	8J	265	763	1090	2403	340/50	BSW	YES	YES	YES
275/35R19	100VXL	9 1/2J	278	675	800	1764	340/50	BSW	YES	YES	YES
275/40R19	105VXL	9 1/2J	278	703	925	2039	340/50	BSW	YES	YES	YES
285/45R19	111HXL	9 1/2J	285	739	1090	2403	340/50	BSW	YES	YES	YES
255/50R20	109HXL	8J	265	764	1030	2271	340/50	BSW	YES	YES	YES
255/55R20	110HXL	8J	265	788	1060	2337	340/50	BSW	YES	YES	YES
265/45R20	108HXL	9J	266	746	1000	2205	340/50	BSW	YES	YES	YES
275/35R20	102HXL	9 1/2J	278	700	850	1874	340/50	BSW	YES	YES	YES
275/40R20	106HXL	9 1/2J	278	728	950	2094	340/50	BSW	YES	YES	YES
275/45R20	110HXL	9J	273	756	1060	2337	340/50	BSW	YES	YES	YES
275/50R20	113HXL	8 1/2J	284	784	1150	2535	340/50	BSW	YES	YES	YES
275/55R20	117SXL	8 1/2J	284	810	1285	2833	340/50	BSW	YES	YES	YES
285/50R20	116HXL	9J	297	794	1250	2756	340/50	BSW	YES	YES	YES
305/40R20	112HXL	11J	313	752	1120	2469	340/50	BSW	YES	YES	YES
315/35R20	110VXI	11J	320	728	1060	2337	340/50	BSW	YES	YES	YES
265/45R21	108HXL	9J	266	771	1000	2205	340/50	BSW	YES	YES	YES
275/40R21	107HXL	9 1/2J	278	753	975	2149	340/50	BSW	YES	YES	YES
275/45R21	110HXL	9J	273	781	1060	2337	340/50	BSW	YES	YES	YES
275/50R21	113HXL	8 1/2J	284	809	1150	2535	340/50	BSW	YES	YES	YES
285/40R21	109HXL	10J	290	761	1030	2271	340/50	BSW	YES	YES	YES
295/35R21	107HXL	10 1/2J	301	739	975	2149	340/50	BSW	YES	YES	YES
295/40R21	111HXL	10 1/2J	301	769	1090	2403	340/50	BSW	YES	YES	YES
315/35R21	111HXL	11J	320	753	1090	2403	340/50	BSW	YES	YES	YES
315/40R21	115HXL	11J	320	785	1215	2679	340/50	BSW	YES	YES	YES
275/40R22	107HXL	9 1/2J	278	779	975	2149	340/50	BSW	YES	YES	YES



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.

WINTER GL868

ST WINTER MT AT HT A/S VAN RFT UHP HP




Zigzag grooves

Zigzag vertical grooves design reduces the snows in the grooves and builds the effect of meshing between tyre and snow. Ensure the riding safety through pressing and removing snow by rolling.



Steel hook design

Steel hook design. Central hook-like pattern block ensure the driving horizontal rigidity of on dry and wet road. This design provides great performance on both horizontal rigidity and turning handling.

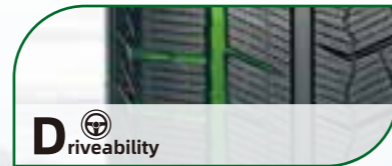

Zigzag steel sheets

Zigzag steel sheets design. 3D Densely zigzag steel sheets design increase anti-slip ability on ice road.



Flash ribs

Flash ribs design provide excellent handling and braking performance, increase the traction ability on ice road.



Size	LI/SI	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall	🗓️	🚗	🔊
					(kg)	(Lbs)					
155/65R13	73T	4.50B	157	532	365	805	300/44	BSW	YES	YES	YES
155/70R13	75T	4 1/2J	157	548	387	853	300/44	BSW	YES	YES	YES
165/70R13	79T	5.00B	170	562	437	963	300/44	BSW	YES	YES	YES
155/65R14	75T	4 1/2J	157	558	387	853	300/44	BSW	YES	YES	YES
165/65R14	79T	5J	170	570	437	963	300/44	BSW	YES	YES	YES
165/70R14	85TXL	5J	170	588	515	1135	340/50	BSW	YES	YES	YES
175/70R14	88T	5J	177	602	560	1235	340/50	BSW	YES	YES	YES
185/60R14	82T	5 1/2J	189	578	475	1047	300/44	BSW	YES	YES	YES
185/65R14	86H	5 1/2J	189	596	530	1168	300/44	BSW	YES	YES	YES
195/60R14	86H	6J	201	590	530	1168	300/44	BSW	YES	YES	YES
175/65R15	84T	5J	177	609	500	1102	300/44	BSW	YES	YES	YES
185/60R15	84H	5 1/2J	189	603	500	1102	300/44	BSW	YES	YES	YES
185/65R15	88H	5 1/2J	189	621	560	1235	300/44	BSW	YES	YES	YES
195/55R15	85V	6J	201	595	515	1135	300/44	BSW	YES	YES	YES
195/60R15	88H	6J	201	615	560	1235	300/44	BSW	YES	YES	YES
195/65R15	95T	6J	201	635	690	1521	340/50	BSW	YES	YES	YES
205/65R15	94H	6J	209	647	670	1477	300/44	BSW	YES	YES	YES
215/70R15	98T	6 1/2J	221	683	750	1653.45	300/44	BSW	YES	YES	YES
195/55R16	91H XL	6J	201	620	615	1356	340/50	BSW	YES	YES	YES
195/60R16	89H	6J	201	640	580	1279	300/44	BSW	YES	YES	YES
205/55R16	91H	6 1/2J	214	632	615	1356	300/44	BSW	YES	YES	YES
205/55R16	94H	6 1/2J	214	632	670	1477	340/50	BSW	YES	YES	YES
205/60R16	96H	6J	209	652	710	1565	340/50	BSW	YES	YES	YES
215/55R16	97H XL	7J	226	642	730	1609	340/50	BSW	YES	YES	YES
215/60R16	99H	6 1/2J	221	664	775	1709	340/50	BSW	YES	YES	YES
215/70R16	100T	6 1/2J	221	708	800	1763.68	300/44	BSW	YES	YES	YES
225/70R16	107TXL	6 1/2J	228	722	975	2149	340/50	BSW	YES	YES	YES
235/60R16	100H	7J	240	688	800	1764	300/44	BSW	YES	YES	YES
245/70R16	111TXL	7J	248	750	1090	2403.014	340/50	BSW	YES	YES	YES
265/70R16	112T	8J	272	778	1120	2469	300/44	BSW	YES	YES	YES
205/50R17	93H XL	6 1/2J	214	638	650	1433	340/50	BSW	YES	YES	YES
215/50R17	95H XL	7J	226	648	690	1521	340/50	BSW	YES	YES	YES
215/55R17	98V	7J	226	668	750	1653	340/50	BSW	YES	YES	YES
215/60R17	96H	6 1/2J	221	690	710	1565	300/44	BSW	YES	YES	YES
225/50R17	98H XL	7J	233	658	750	1653	340/50	BSW	YES	YES	YES
225/55R17	101V	7J	233	680	825	1819	340/50	BSW	YES	YES	YES
225/60R17	99H	6 1/2J	228	702	775	1709	300/44	BSW	YES	YES	YES
235/45R17	97H XL	8J	236	644	730	1609	340/50	BSW	YES	YES	YES
235/55R17	103H XL	7 1/2J	245	690	875	1929	340/50	BSW	YES	YES	YES
235/60R17	102H	7J	240	714	850	1873	300/44	BSW	YES	YES	YES
235/65R17	108T XL	7J	240	738	1000	2205	340/50	BSW	YES	YES	YES
245/65R17	107S	7J	248	750	975	2149	300/44	BSW	YES	YES	YES
255/60R17	110TXL	7 1/2J	260	738	1060	2337	340/50	BSW	YES	YES	YES
265/65R17	112T	8J	272	776	1120	2469.152	300/44	BSW	YES	YES	YES
265/70R17	115T	8J	272	804	1215	2678.589	300/44	BSW	YES	YES	YES
225/40R18	92H XL	8J	230	637	630	1389	340/50	BSW	YES	YES	YES
225/45R18	95H XL	7 1/2J	225	659	690	1521	340/50	BSW	YES	YES	YES
235/45R18	98H XL	8J	236	669	750	1653	340/50	BSW	YES	YES	YES
225/60R18	104HXL	6 1/2J	228	727	900	1984	340/50	BSW	YES	YES	YES
235/60R18	107H XL	7J	240	739	975	2149	340/50	BSW	YES	YES	YES
245/40R18	97VXL	8 1/2J	248	653	730	1609	340/50	BSW	YES	YES	YES
245/45R18	100H XL	8J	243	677	800	1764	340/50	BSW	YES	YES	YES
245/60R18	105H	7J	248	751	925	2039	300/44	BSW	YES	YES	YES
255/55R18	109H XL	8J	265	737	1030	2271	340/50	BSW	YES	YES	YES
255/60R18	112TXL	7 1/2J	260	763	1120	2469	340/50	BSW	YES	YES	YES
265/60R18	110T	8J	272	775	1060	2337	300/44	BSW	YES	YES	YES
265/70R18	116S	8J	272	829	1250	2756	300/44	BSW	YES	YES	YES
285/60R18	116H	8 1/2J	292	799	1250	2756	300/44	BSW	YES	YES	YES
235/55R19	105HXL	7 1/2J	245	741	925	2039	340/50	BSW	YES	YES	YES
245/45R19	102HXL	8J	243	703	850	1874	340/50	BSW	YES	YES	YES
245/55R19	107HXL	7 1/2J	253	753	975	2149	340/50	BSW	YES	YES	YES
255/50R19	107HXL	8J	265	739	975	2149	340/50	BSW	YES	YES	YES
255/55R19	111HXL	8J	265	763	1090	2403	340/50	BSW	YES	YES	YES
255/45R20	105VXL	8 1/2J	255	738	925	2039	340/50	BSW	YES	YES	YES
275/40R20	106HXL	9 1/2J	278	728	950	2094	340/50	BSW	YES	YES	YES
275/45R20	110H XL	9J	273	756	1060	2337	340/50	BSW	YES	YES	YES
275/60R20	119HXL	8J	279	838	1360	2998	340/50	BSW	YES	YES	YES
315/35R20	110VXL	11J	320	728	1060	2337	340/50	BSW	YES	YES	YES

* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.

L-SNOW96

ST WINTER MT AT HT A/S VAN RFT UHP HP



Z grooves

"Z" groove design at the outside improve snow melt ability and ice grip.



Cuneiform pattern

Cuneiform pattern design. Small angle cuneiform block inside provide great anti-slip ability and traction ability.



3D shoulder

3D shoulder design enlarges the contact area and removes the snow on shoulder through ladder structure in rolling period.



3D slips

Updated 3D slip design ensures the max driving grip ability when the grooves contact the ice road, and remain the rigidity of block when the grooves close. Improve the driving stability and safety.



Size	LI/SI	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall			
					(kg)	(Lbs)					
155/65R13	73T	4.50B	157	532	365	805	300/44	BSW	YES	YES	YES
155/80R13	79T	4.50B	157	578	437	963	300/44	BSW	YES	YES	YES
165/70R13	79T	5.00B	170	562	437	963	300/44	BSW	YES	YES	YES
175/70R13	82T	5.00B	177	576	475	1047	300/44	BSW	YES	YES	YES
165/60R14	75T	5J	170	554	387	853	300/44	BSW	YES	YES	YES
175/65R14	82T	5J	177	584	475	1047	300/44	BSW	YES	YES	YES
175/70R14	88T	5J	177	602	500	1102	340/44	BSW	YES	YES	YES
185/60R14	82T	5 1/2J	189	578	475	1047	300/44	BSW	YES	YES	YES
185/65R14	86T	5 1/2J	189	596	530	1168	300/44	BSW	YES	YES	YES
185/70R14	92T	5 1/2J	189	616	560	1235	340/44	BSW	YES	YES	YES
195/70R14	95T	6J	201	630	615	1356	340/44	BSW	YES	YES	YES
185/55R15	82H	6J	194	585	475	1047	300/44	BSW	YES	YES	YES
185/60R15	88H	5 1/2J	189	603	500	1102	300/44	BSW	YES	YES	YES
185/65R15	88H	5 1/2J	189	621	560	1235	300/44	BSW	YES	YES	YES
195/50R15	82H	6J	201	577	475	1047	300/44	BSW	YES	YES	YES
195/55R15	85H	6J	201	595	515	1135	300/44	BSW	YES	YES	YES
195/60R15	88H	6J	201	615	560	1235	300/44	BSW	YES	YES	YES
195/65R15	91H	6J	201	635	615	1356	300/44	BSW	YES	YES	YES
205/65R15	94H	6J	209	647	670	1477	300/44	BSW	YES	YES	YES
205/55R16	91H	6 1/2J	214	632	615	1356	300/44	BSW	YES	YES	YES
205/60R16	96H	6J	209	652	630	1389	340/44	BSW	YES	YES	YES
215/60R16	99H	6 1/2J	221	664	690	1521	340/44	BSW	YES	YES	YES
215/65R16	98H	6 1/2J	221	686	750	1653	300/44	BSW	YES	YES	YES
225/55R16	99H	7J	233	654	690	1521	300/44	BSW	YES	YES	YES
225/60R16	98H	6 1/2J	228	676	750	1653	300/44	BSW	YES	YES	YES
235/70R16	106T	7J	240	736	950	2094	300/44	BSW	YES	YES	YES
225/45R17	94H	7 1/2J	225	634	670	1477	340/50	BSW	YES	YES	YES
225/65R17	102T	6 1/2J	228	724	850	1874	300/44	BSW	YES	YES	YES



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.

WINTER GL989

ST WINTER MT AT HT A/S VAN RFT UHP HP



The tacit connection of the longitudinal and transverse grooves complemented by a fine and tortuous sipe design

Effective elimination of snow and better grip to greatly increase the adhesion to ice and snow, eliminate hydroplaning and improve mud & snow shedding and self-cleaning performance.



Combination design of shoulder blocks and special sipe

Effectively equalize the rigidity of the block to ensure excellent turning performance and handling; combined design of the block and the sipe to significantly increase the number of lateral grooves without affecting the overall rigidity of the block, more and further balanced contact area on the snow and ice road for better braking performance.



Special compound design for winter pattern

Improve the traction and grip of winter tires on snow and ice.



Optimized contour design and material structure distribution

Provides smooth operation and even pressure distribution.



Size	LI/SI	PR	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall	Treadwear	Snowflake	M+S
						(kg)	(Lbs)					
NEW 165/70R14C	89/87R	6PR	5J	170	588	580/545	1279/1202	375/54	BSW	YES	YES	YES
NEW 175/65R14C	90/88T	6PR	5J	177	584	600/560	1323/1235	375/54	BSW	YES	YES	YES
NEW 175/70R14C	95/93T	6PR	5J	177	602	690/650	1521/1433	375/54	BSW	YES	YES	YES
175R14C	99/97R	8PR	5J	177	636	775/730	1709/1609	450/65	BSW	YES	YES	YES
185R14C	102/100R	8PR	5 1/2J	188	650	850/800	1874/1764	450/65	BSW	YES	YES	YES
195/70R15C	104/102R	8PR	6J	201	655	900/850	1984/1874	450/65	BSW	YES	YES	YES
205/70R15C	106/104R	8PR	6J	209	669	950/900	2094/1984	450/65	BSW	YES	YES	YES
215/65R15C	104/102R	6PR	6 1/2J	221	661	900/850	1984/1874	375/54	BSW	YES	YES	YES
215/70R15C	109/107R	8PR	6 1/2J	221	683	1030/975	2271/2149	450/65	BSW	YES	YES	YES
225/70R15C	112/110R	8PR	6 1/2J	228	697	1120/1060	2469/2337	450/65	BSW	YES	YES	YES
NEW 175/75R16C	98/96R	6PR	5J	177	668	750/710	1653/1565	375/54	BSW	YES	YES	YES
185/75R16C	104/102R	8PR	5J	184	684	900/850	1984/1874	475/69	BSW	YES	YES	YES
NEW 195/60R16C	99/97H	6PR	6J	201	640	775/730	1709/1609	375/54	BSW	YES	YES	YES
195/65R16C	104/102R	8PR	6J	201	660	900/850	1984/1874	475/69	BSW	YES	YES	YES
195/75R16C	107/105R	8PR	5 1/2J	196	698	975/925	2149/2039	475/69	BSW	YES	YES	YES
205/65R16C	107/105R	8PR	6J	209	672	975/925	2149/2039	475/69	BSW	YES	YES	YES
NEW 205/75R16C	110/108R	8PR	5 1/2J	203	714	1060/1000	2337/2204	475/69	BSW	YES	YES	YES
NEW 215/60R16C	103/101T	6PR	6 1/2J	221	664	875/825	1929/1819	375/54	BSW	YES	YES	YES
215/65R16C	109/107R	8PR	6 1/2J	221	686	1030/975	2271/2149	475/69	BSW	YES	YES	YES
215/75R16C	113/111R	8PR	6J	216	728	1150/1090	2535/2403	475/69	BSW	YES	YES	YES
225/65R16C	112/110R	8PR	6 1/2J	228	698	1120/1060	2469/2337	475/69	BSW	YES	YES	YES
NEW 225/75R16C	116/114R	8PR	6J	223	744	1250/1180	2756/2601	475/69	BSW	YES	YES	YES
235/65R16C	115/113R	8PR	7J	240	712	1215/1150	2679/2535	475/69	BSW	YES	YES	YES




* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.

L-TRAVEL18

Reinforced polyester cord design

Reinforced polyester cord design greatly improve the load capacity of the tire and deliver a longer life under high load conditions.

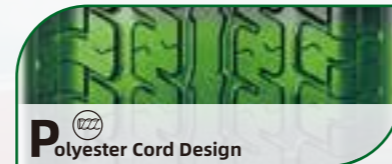

Three continuous no-breaking zigzag pattern design

Three continuous no-breaking zigzag pattern design in the middle tread enlarge the contact area between tire and road surface, deliver a smooth driving, even wear, and a long durability.



Size	LI/SI	PR	Rim	S/W (mm)	O/W (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall	Treadwear	Traction	Temp. Resist.
						(kg)	(Lbs)					
ST145R12	87L	8PR	4.50B	145	536	560	1220	450/65	BSW	YES	YES	YES
ST145R12	95L	10PR	4.50B	145	536	689	1520	550/80	BSW	YES	YES	YES
ST175/80R13	91/87L	6PR	5.00B	177	610	615/545	1360/1200	350/50	BSW	YES	YES	YES
ST185/80R13	99/95L	8PR	5.00B	184	626	775/690	1710/1520	450/65	BSW	YES	YES	YES
ST205/75R14	100/96L	6PR	5 1/2J	203	664	800/710	1760/1570	350/50	BSW	YES	YES	YES
ST205/75R14	105/101L	8PR	5 1/2J	203	664	925/825	2040/1820	450/65	BSW	YES	YES	YES
ST215/75R14	102/98L	6PR	6J	216	678	850/750	1870/1650	350/51	BSW	YES	YES	YES
ST205/75R15	101/97L	6PR	5 1/2J	203	689	825/730	1820/1610	350/50	BSW	YES	YES	YES
ST205/75R15	107/102L	8PR	5 1/2J	203	689	975/850	2150/1870	450/65	BSW	YES	YES	YES
ST225/75R15	113/108L	8PR	6J	223	719	1150/1000	2540/2200	450/65	BSW	YES	YES	YES
ST225/75R15	117/112L	10PR	6J	223	719	1285/1120	2830/2470	550/80	BSW	YES	YES	YES
ST225/75R15	107/102L	6PR	6J	223	719	975/850	2150/1870	350/50	BSW	YES	YES	YES
ST235/80R16	124/120L	10PR	6 1/2J	235	782	1600/1400	3420/3000	550/80	BSW	YES	YES	YES
ST235/85R16	125/121L	10PR	6 1/2J	235	806	1650/1450	3640/3200	550/80	BSW	YES	YES	YES
ST235/85R16	128/124L	12PR	6 1/2J	235	806	1800/1600	3960/3520	660/95	BSW	YES	YES	YES

ST WINTER MT AT HT A/S VAN RFT UHP HP

