



***TRUCK & BUS
TIRES***

TEEREX



M-02

POSITION



- Transverse wide groove design provides outstanding traction performance.
- Longitudinal grooves improve the performance of drainage and heat dissipation.
- Cut resistance compound design suitable for various road conditions.
- Wider tread cap and deeper grooves provide excellent wear resistance.

Size	PR	LI	SS	Standard Rim	OTD (mm)
12R22.5	18	152/149	L	9.00	22.5



TDM708

POSITION



- Transverse and wide grooves provide outstanding traction performance.
- Longitudinal grooves improve the performance of drainage and heat dissipation.
- Cutting resistance compound is suitable for various road conditions.
- Wider tread cap and deeper grooves provide excellent wear resistance.

Size	PR	LI	SS	Standard Rim	OTD (mm)
9.5R17.5	18	143/141	L	6.75	15.0
11R22.5	16	146/143	K	8.25	21.5
▲ 12R22.5	18	152/149	L	9.00	22.5

▲ With special pattern size 130% overload.



TAH755

POSITION



- The large and deep grooves on the shoulders aim to increase the driving performance.
- Three main longitudinal grooves provide good directional stability and reduce irregular wear and are adapted to various conditions.
- Wider running surface and the puncture resistance formula reduce abrasion.

Size	PR	LI	SS	Standard Rim	OTD (mm)
7.50R16LT	14	122/118	L	6.00G	13.5
11R22.5	18	146/143	M	8.25	15.0
13R22.5	18	154/151	L	9.75	17.0
12.00R24	20	160/157	K	8.5	15.0
315/80R22.5	20	156/150	M	9.00	16.0



TDM709

POSITION



- Big block pattern protects the tyres against wear, cut and tear.
- Wider tread cap effectively increase mileage.
- Anti-clamping stone design prevents from groove cracking.
- Special mining compound protects against puncture, chunking and chipping.

Size	PR	LI	SS	Standard Rim	OTD (mm)
12R22.5	18	152/149	J	9.00	22.5



TAH78

POSITION



- Provide excellent anti-skid and handling performance.
- Effectively increase tire's driving performance, reduce heat generation and improve durability.
- Reduce tread heat generation, and deliver excellent durability.
- Provide excellent wear resistance performance.

Size	PR	LI	SS	Standard Rim	OTD (mm)
385/65R22.5	24	160	K	11.75	14.5



TDM756

POSITION



- Wider and horizontal grooves greatly improve self-cleaning ability and driving performance.
- The interconnecting ribs between pattern blocks reduce the movement and decrease partial wear.
- High wear resistance and low heat generation of the tread rubber ensure long service life.

Size	PR	LI	SS	Standard Rim	OTD (mm)
295/80R22.5	18	152/149	L	9.00	20.0
315/80R22.5	20	156/150	L	9.00	20.0



TDM758

POSITION



- Optimized tread block pitch sequence offers better traction and acoustic comfort.
- Optimized design to reduce noise generation.
- Optimum grip on various road conditions.

Size	PR	LI	SS	Standard Rim	OTD (mm)
295/80R22.5	18	152/149	L	9.00	20.0



TDM759

POSITION



- Lower operating temperatures benefit tyre integrity and retreadability.
- Increased resistance to tears and lacerations.
- Less possibility of accidental casing damage.

Size	PR	LI	SS	Standard Rim	OTD (mm)
215/75R17.5	18	135/133	L	6.00	15.5
235/75R17.5	18	143/141	L	6.75	16.0



TDM783

POSITION




- Provide a longer mileage.
- Provide excellent driving and grips performance.
- Enhance the grips performance on wet roads.
- Reduce tread heat generation, and deliver excellent durability.

Size	PR	LI	SS	Standard Rim	OTD (mm)
11R22.5	18	148/145	M	8.25	19.5
11R24.5	18	149/146	M	8.25	19.5



TDM85

POSITION

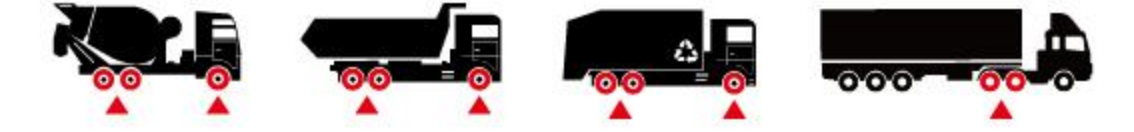

- The geometric design of grooves ensures easily self-cleaning, better traction and even wear.
- Added protection at the bottom of grooves effectively avoids stone trapping and gives better resistance.
- Aggressive directional tread with robust blocks provides extra traction for various road conditions.

Size	PR	LI	SS	Standard Rim	OTD (mm)
315/80R22.5	20	156/150	L	9.00	20.0



TDM87

POSITION



- 265mm wider tread cap leads to excellent wear resistance and long mileage.
- Innovative 3D pattern with variable angle expels stones and avoids groove cracking.
- Four longitudinal grooves provide low rolling resistance and excellent steering performance.
- Advanced cut-resistant tread compound provides outstanding wear resistance.

Size	PR	LI	SS	Standard Rim	OTD (mm)
315/80R22.5	20	156/150	L	9.00	16.5



TDM89

POSITION



- 275mm wider tread cap and 24.5mm deeper grooves improve wear resistance and service life.
- Scientific tread compound reduces abrasion rate. Low rolling resistance is fuel-saving.
- Long hexagonal pattern blocks and strong bead wires deliver longer service life and reduce damages.
- High bridges of shoulder ribs prevent scrubbing. Pattern blocks with double wavy sipes deliver extra traction.

Size	PR	LI	SS	Standard Rim	OTD (mm)
11R22.5	16	146/143	L	8.25	21.5
▲ 315/80R22.5	20	156/150	L	9.00	24.5

▲ With special pattern size 275mm Tread Width.



TDM98

POSITION



- Wider running surface with special compound ensures anti-puncture and anti-abrasion.
- Optimized width of groove shape and ribs minimizes strain at groove bottom.
- Minimal variation of pattern shape reduces irregular wear and increase load resistance.
- Four longitudinal grooves with wavy sipes improve handling and traction.

Size	PR	LI	SS	Standard Rim	OTD (mm)
12R22.5	18	152/149	L	9.00	21.0



TH092

POSITION



- It has excellent anti-slip performance and low rolling resistance.
- Closed shoulder design is of low noise and reduce tire wear.
- The crown is designed with a spring sleeve to make the tire look more beautiful.

Size	PR	LI	SS	Standard Rim	OTD (mm)
12R22.5	18	152/149	L	9.00	17.0



TDM99

POSITION



- Transverse wide groove design provides outstanding traction performance.
- Longitudinal grooves improve the performance of drainage and heat dissipation.
- Cut resistance compound design suitable for various road conditions.
- Wider tread cap and deeper grooves provide excellent wear resistance.

Size	PR	LI	SS	Standard Rim	OTD (mm)
11R22.5	16	146/143	L	8.25	21.5
12R22.5	18	152/149	L	9.00	22.5
315/80R22.5	20	156/150	L	9.00	18.0



TSH23

POSITION



- Increased sidewall duration and low rolling resistance.
- Extreme ease in measuring sidewall wear.
- Improved grip on wet and slippery surfaces.

Size	PR	LI	SS	Standard Rim	OTD (mm)
9.5R17.5	18	143/141	L	6.75	13.5
215/75R17.5	18	135/133	L	6.00	12.0
235/75R17.5	18	143/141	L	6.75	13.0
275/70R22.5	18	146/143	L	8.25	14.0
275/80R22.5	18	149/146	L	8.25	14.0
295/80R22.5	18	152/149	M	9.00	16.0
11R22.5	18	148/145	M	8.25	13.5
11R24.5	18	149/146	M	8.25	13.5



TFC751

POSITION



- Four longitudinal grooves are adopted for excellent handling stability and ride comfort at high speed.
- Horizontal grooves and special tiny sipes on the tread improve drainage performance and skid resistance.
- New tread formula is created for outstanding abrasion resistance.

Size	PR	LI	SS	Standard Rim	OTD (mm)
11R22.5	16	146/143	M	8.25	16.0
12R22.5	18	152/149	M	9.00	16.5



YUELONG TIRE GROUP

Web: www.yuelonggroup.net
Email: info@yuelonggroup.net

DISTRIBUTED BY